


Gear Head

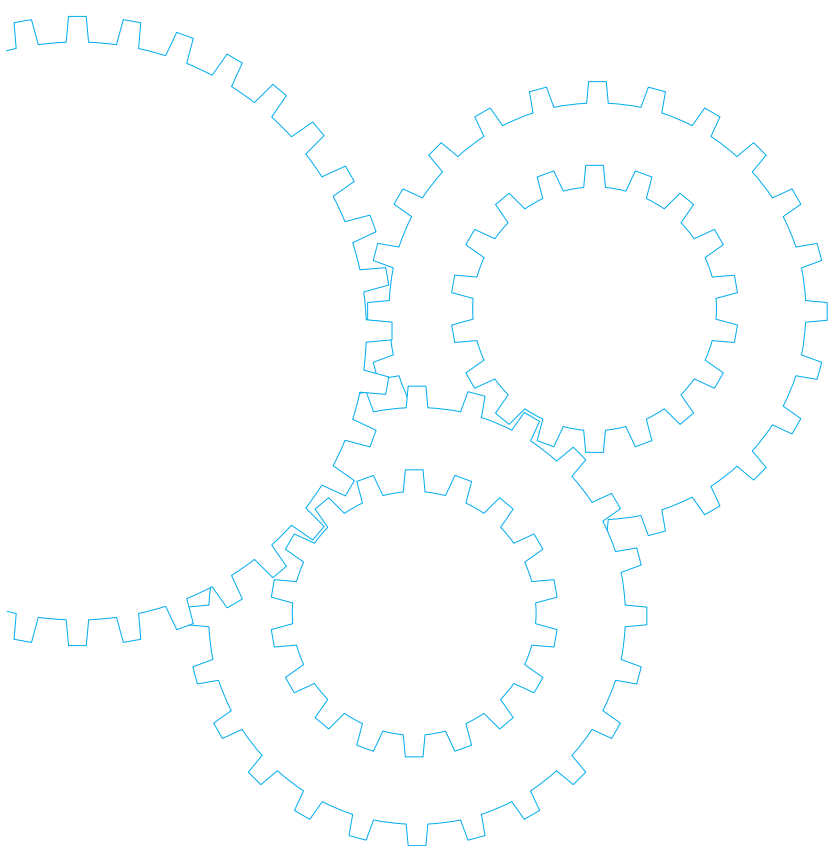

Contents

- Gear head Overview B-432
- Model list B-440
- High torque gear head B-444
- Right-angle gear head B-446
- Decimal gear head B-448

Features


- Various types of gear heads are available.
- The X type is available in a metal bearing model and or a ball bearing type.
- The P type (90 mm sq. only) is high torque type: its maximum permissible shaft torque is 29.4 N·m (300 kgf·cm)
- 22 reduction ratios from 1/3 to 1/180 are available for the X type; 23 reduction ratios from 1/3 to 1/200 are available for the Y and Z types.
When the decimal gear head (reduction ratio: 1/10) is used, a reduction ratio of up to 1/1800 (1/2000 for the Y and Z types) can be attained.
- The X type and Z type of 90 mm sq. are available in right-angle type.
- Gear heads dedicated to C&B motors are available. The gear heads will withstand 2 million start and stop cycles.

For allowable gear head permissible torque, see C&B motor (p. B-348).


Gear type

- A : 3 W or smaller / Hinge not attached (42 mm sq.)
- X : 40 W or smaller / Hinge not attached
- Z : 60 W or larger / Hinge not attached
- Y : 60 W or larger / Hinge attached
- R : 60 W or larger, High torque type / Hinge not attached
- P : 60 W or larger, High torque type / Hinge attached

• Hinge not attached



• Hinge attached





• Gear type and reduction ratio list

| Gear type | Motor capacity | Hinge | Reduction ratio | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-----------------|-----------------|-----------------|-------|-----|-----|-------|-----|------|--------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|
| | | | 1/3 | 1/3.6 | 1/5 | 1/6 | 1/7.5 | 1/9 | 1/10 | 1/12.5 | 1/15 | 1/18 | 1/20 | 1/25 | 1/30 | 1/36 | 1/50 | 1/60 | 1/75 | 1/90 | 1/100 | 1/120 | 1/150 | 1/180 | 1/200 |
| A | 3 W or smaller | Not attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| X | 40 W or smaller | Not attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Y | 60W, 90W | attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Z | | Not attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| P | | attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| R | | Not attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Right-angle | X | 40 W or smaller | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| | Z | 60W, 90W | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| C&B | X | 40 W or smaller | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| | Y | 60 W or larger | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

• Gear type and reduction ratio list (decimal gear head used)

| Gear type | Motor capacity | Hinge | Reduction ratio | | | | | | | | | | | | | | | | | | | | | |
|-------------|-----------------|-----------------|-----------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|---|---|---|---|---|---|---|---|---|
| | | | 1/200 | 1/250 | 1/300 | 1/360 | 1/500 | 1/600 | 1/750 | 1/900 | 1/1000 | 1/1200 | 1/1500 | 1/1800 | 1/2000 | | | | | | | | | |
| X | 40 W or smaller | Not attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Y, P | 60W, 90W | attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Z, R | | Not attached | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Right-angle | X | 40 W or smaller | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| | Z | 60W, 90W | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

Coding system

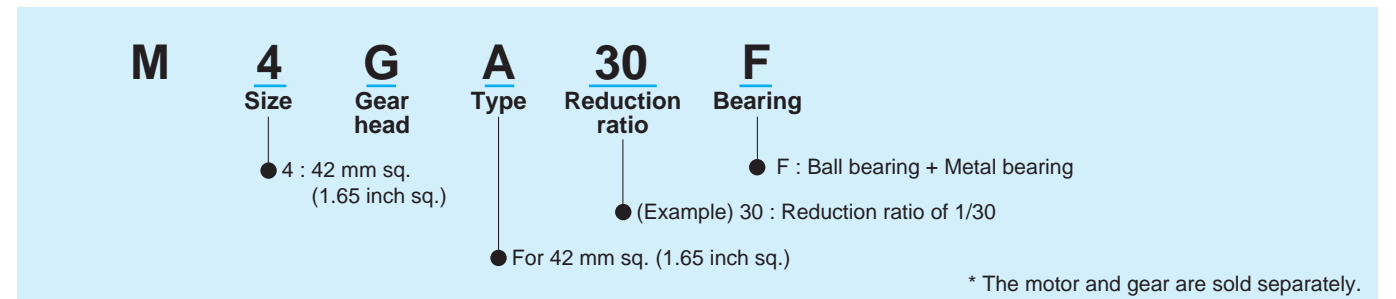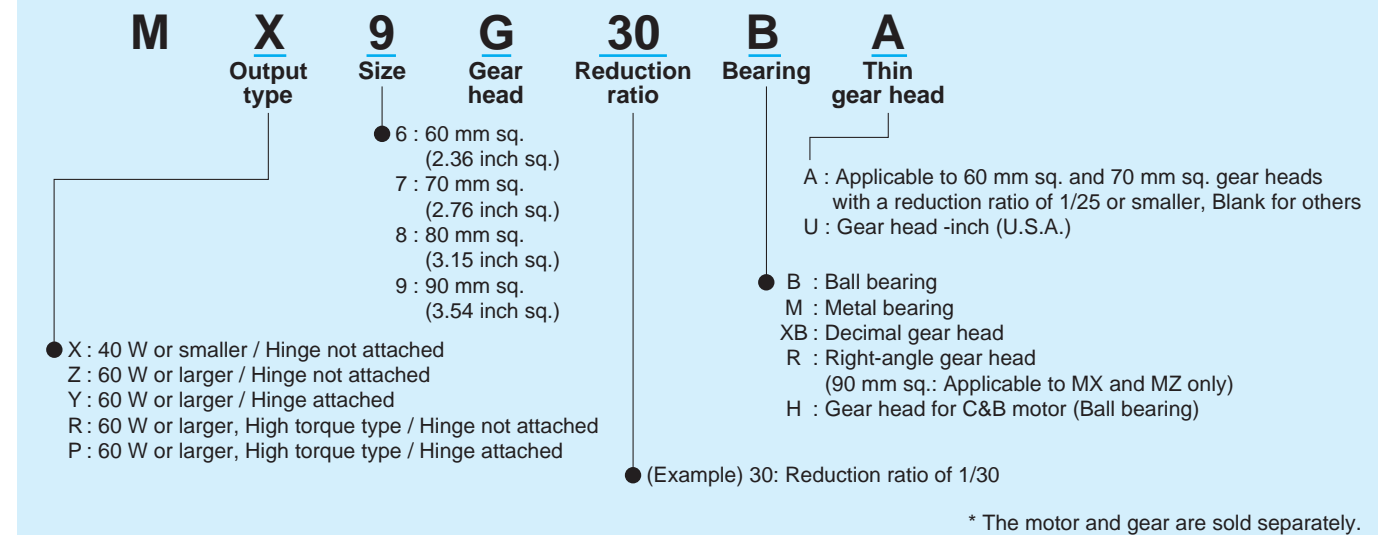

Calculation of torque at output shaft of gear head

• Standard gear head only

$$N_G = \frac{N_M}{i}$$

$$T_G = T_M \times i \times \eta$$

N_G : Speed of gear head (r/min)

N_M : Motor speed (r/min)

i : Reduction ratio of gear head

T_G : Output torque of gear head (N·m)

T_M : Motor torque (N·m)

η : Gear head efficiency

• With decimal gear head

$$N_G = \frac{N_M}{i \times i_D}$$

$$T_G = T_M \times i \times i_D \times \eta \times \eta_D$$

N_G : Speed of gear head (r/min)

N_M : Motor speed (r/min)

i : Reduction ratio of gear head

T_G : Output torque of gear head (N·m)

T_M : Motor torque (N·m)

η : Gear head efficiency

i_D : Reduction ratio of decimal gear head


η_D : Decimal gear head efficiency

* In the case of the variable speed motor, regard the serviceability limit torque as the motor torque.


Maximum permissible torque

There is a limit to the strength of a gear due to its material and construction. The usable load torque determined based on this limit is called permissible torque. As can be seen from the above-mentioned formula, the load becomes larger when the reduction ratio is increased. If the gear head is used with the load exceeding the permissible torque, its life expectancy will be shortened significantly. Refer to the following graph and the permissible torque for each model and use the gear head at an appropriate load.

Maximum permissible torque

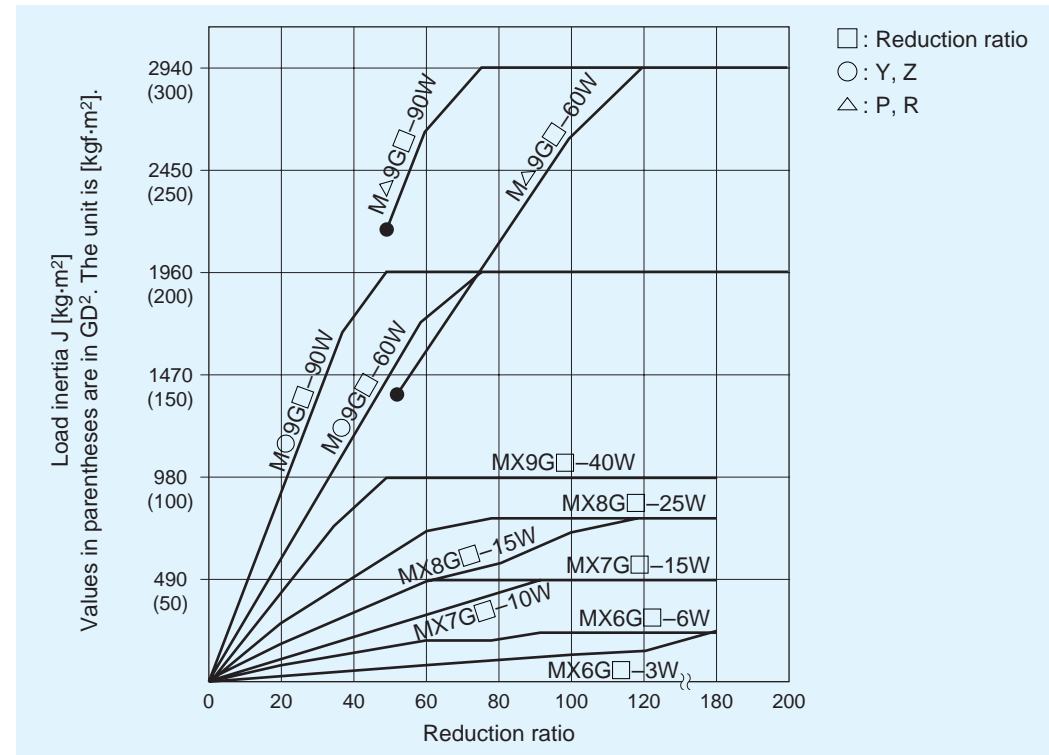

Maximum permissible torque (Gear head for C&B motor)

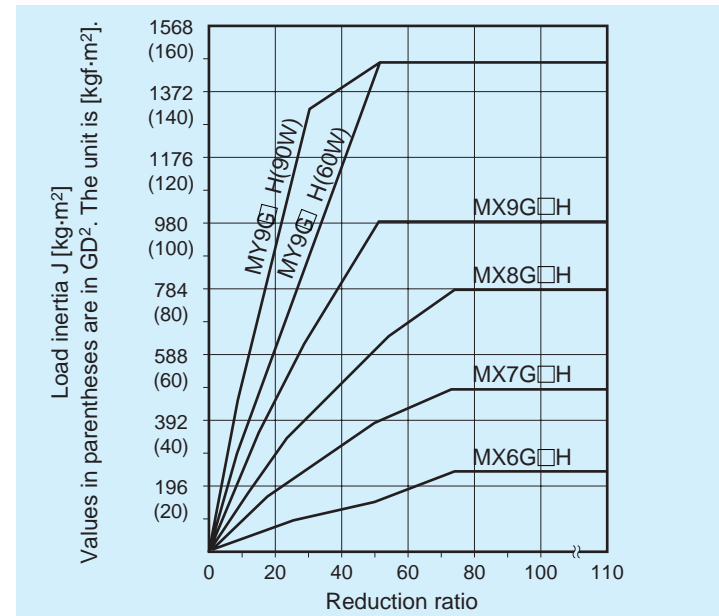

Nominal reduction ratio and actual reduction ratio

Note that there is a difference between the nominal reduction ratio and actual reduction ratio of each gear head. Refer to the table below. When using the gear head, calculate the speed based on the actual reduction ratio.

* Gear heads dedicated to C&B motors have the same nominal reduction ratio and actual reduction ratio. Example: nominal reduction ratio 1/3; actual reduction ratio 1/3

For practical use, calculate the speed based on the actual reduction ratio.

Gear head

| Nominal reduction ratio | Actual reduction ratio | | | | | | | | | |
|-------------------------|------------------------|---------|---------|---------|---------|----------------|----------------|----------------------------|----------------------------|---------------|
| | M4GA□ | MX6G□ | MX7G□ | MX8G□ | MX9G□ | MZ9G□ MY9G□ | MR9G□ MP9G□ | Right-angle type MX9G□R | Right-angle type MZ9G□R | for C&B motor |
| 1/3 | 1/3 | 1/2.96 | 1/2.99 | 1/3.01 | 1/2.98 | 1/3.02 | — | 1/3.05 | 1/3.00 | 1/3 |
| 1/3.6 | 1/3.6 | 1/3.59 | 1/3.64 | 1/3.60 | 1/3.59 | 1/3.61 | — | 1/3.65 | 1/3.62 | 1/3.6 |
| 1/5 | 1/5 | 1/5.04 | 1/4.95 | 1/4.98 | 1/5.00 | 1/5.03 | — | 1/5.06 | 1/4.97 | 1/5 |
| 1/6 | 1/6 | 1/6.01 | 1/6.08 | 1/5.96 | 1/6.00 | 1/6.02 | — | 1/5.93 | 1/6.00 | 1/6 |
| 1/7.5 | 1/7.5 | 1/7.49 | 1/7.48 | 1/7.48 | 1/7.54 | 1/7.58 | — | 1/7.50 | 1/7.57 | 1/7.5 |
| 1/9 | 1/9 | 1/9.07 | 1/8.98 | 1/9.00 | 1/9.07 | 1/9.06 | — | 1/9.09 | 1/9.14 | 1/9 |
| 1/10 | — | 1/9.91 | 1/10.1 | 1/9.99 | 1/9.90 | 1/10.2 | — | — | — | 1/10 |
| 1/12.5 | 1/12.5 | 1/12.7 | 1/12.6 | 1/12.5 | 1/12.5 | 1/12.3 | — | 1/12.5 | 1/12.6 | 1/12.5 |
| 1/15 | 1/15 | 1/15.1 | 1/14.9 | 1/14.9 | 1/14.9 | 1/14.8 | — | 1/15.2 | 1/15.2 | 1/15 |
| 1/18 | 1/18 | 1/18.0 | 1/18.0 | 1/18.1 | 1/18.0 | 1/18.0 | — | 1/17.8 | 1/17.8 | 1/18 |
| 1/20 | — | 1/19.8 | 1/19.8 | 1/20.1 | 1/20.0 | 1/19.9 | — | — | — | 1/20 |
| 1/25 | 1/25 | 1/25.0 | 1/25.3 | 1/25.1 | 1/25.3 | 1/25.5 | — | 1/25.0 | 1/25.3 | 1/25 |
| 1/30 | 1/30 | 1/29.7 | 1/30.2 | 1/30.3 | 1/30.4 | 1/30.1 | — | 1/30.2 | 1/30.4 | 1/30 |
| 1/36 | 1/36 | 1/36.4 | 1/36.4 | 1/36.4 | 1/36.5 | 1/36.1 | — | 1/36.3 | 1/36.2 | 1/36 |
| 1/50 | 1/50 | 1/50.4 | 1/49.8 | 1/49.8 | 1/50.2 | 1/50.9 | 1/50.9 | 1/49.4 | 1/49.6 | 1/50 |
| 1/60 | 1/60 | 1/59.6 | 1/59.9 | 1/61.2 | 1/61.3 | 1/60.5 | 1/60.5 | 1/60.5 | 1/59.8 | 1/60 |
| 1/75 | 1/75 | 1/75.8 | 1/75.4 | 1/76.2 | 1/74.6 | 1/76.0 | 1/76.0 | 1/74.1 | 1/75.6 | 1/75 |
| 1/90 | 1/90 | 1/90.1 | 1/90.8 | 1/90.5 | 1/88.3 | 1/89.8 | 1/89.8 | 1/90.7 | 1/90.0 | 1/90 |
| 1/100 | 1/100 | 1/98.9 | 1/100.7 | 1/98.0 | 1/97.8 | 1/98.6 | 1/98.6 | 1/100.0 | 1/101.2 | 1/100 |
| 1/120 | 1/120 | 1/119.3 | 1/119.2 | 1/122.5 | 1/120.0 | 1/121.2 | 1/121.2 | 1/121.2 | 1/121.9 | 1/120 |
| 1/150 | 1/150 | 1/148.9 | 1/147.6 | 1/148.9 | 1/146.5 | 1/150.4 | 1/150.4 | 1/154.6 | 1/151.1 | 1/150 |
| 1/180 | 1/180 | 1/179.3 | 1/180.0 | 1/183.5 | 1/177.0 | 1/182.1 | 1/182.1 | 1/182.2 | 1/182.2 | 1/180 |
| 1/200 | — | — | — | — | — | 1/202.1 | 1/202.1 | — | 1/202.4 | 1/200 |

Decimal gear head

| Nominal reduction ratio | Actual reduction ratio | | | | |
|-------------------------|------------------------|----------|----------|----------|----------|
| | MX6G10XB | MX7G10XB | MX8G10XB | MX9G10XB | MZ9G10XB |
| 1/10 | 1/10.04 | 1/9.93 | 1/9.94 | 1/10.0 | 1/9.97 |


Gear head efficiency

| Model No. | Reduction ratio | | | | | | | | | | | | | | | | | | | Decimal gear head | | | | | |
|---|-----------------|-----|-----|---|-----|-----|----|------|-----|----|-----|----|----|-----|-----|----|----|-----|-----|-------------------|-----|-----|-----|-----|-----|
| | 3 | 3.6 | 5 | 6 | 7.5 | 9 | 10 | 12.5 | 15 | 18 | 20 | 25 | 30 | 36 | 50 | 60 | 75 | 90 | 100 | | 120 | 150 | 180 | 200 | |
| M4GA□F | | | 72% | | | | — | | 61% | | — | | | 52% | | | | | 41% | | | | | | — |
| MX6G□B MX7G□B MX8G□B MX9G□B | | | | | | 81% | | | | | | | | | | | | 75% | | | | | | — | 81% |
| MZ9G□B MY9G□B | | | 81% | | | | | | | | 75% | | | | | | | | 70% | | | | | | 81% |
| MR9G□B MP9G□B | | | | | | | — | | | | | | | | | | | | 70% | | | | | | 81% |
| MX6G□M MX7G□M MX8G□M MX9G□M | | | | | | 72% | | | | | | | | | | | | 61% | | | | | | — | 81% |
| MX9G□R | | | 60% | | | | — | | 60% | | — | | | | 60% | | | | | 45% | | | | — | 81% |
| MZ9G□R | | | 60% | | | | — | | 60% | | — | | | | 60% | | | | 54% | | 45% | | | | 81% |
| for C&B motor MX6G□H MX7G□H MX8G□H MX9G□H | | | | | | 81% | | | | | | | | | | | | 75% | | | | | 70% | — | — |
| MY9G□H | | | 81% | | | | | | | | | | | | | | | 70% | | | | | 65% | | — |

* When the decimal gear head is used, the total efficiency is the product of gear head efficiency and decimal gear head efficiency.

Gear head efficiency and ambient temperature

Calculate the actual gear head efficiency by multiplying the above-shown gear head efficiency at room temperature by the torque reduction ratio shown below.

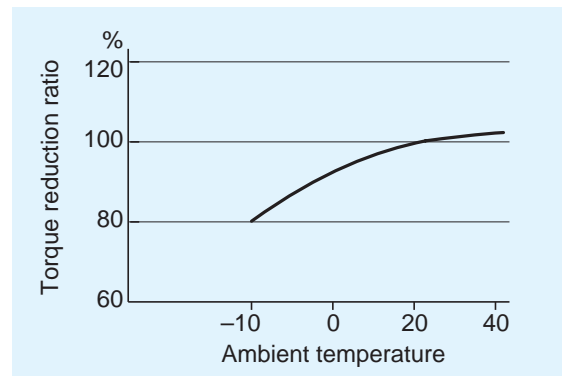


Overhung load and thrust load

The overhung load is defined as a load applied to the output shaft in the right-angle direction. This load is generated when the gear head is coupled to the machine using a chain, belt, etc., but not when the gear head is directly connected to the coupling. As shown in the figure below, the permissible value is determined based on the load applied to the L/2 position of the output shaft.

The thrust load is defined as a load applied to the output shaft in the axial direction. Because the overhung load and thrust load significantly affect the life of the bearing, take care not to allow the load during operation to exceed the permissible overhung load and thrust load shown in the table below.

• Overhung load and thrust load

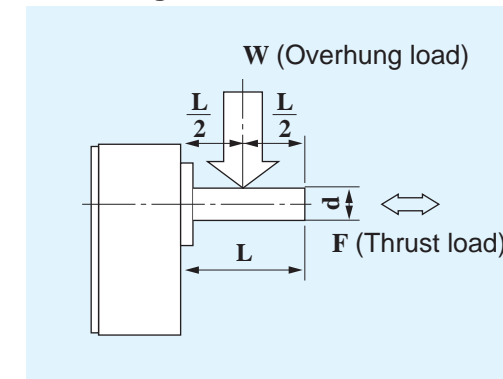

• Permissible load list

| Size | Model | Permissible overhung load | | | Permissible thrust load | | |
|---|-----------|---------------------------|-----|-----|-------------------------|-----|-----|
| | | N | kgf | lb | N | kgf | lb |
| 42 mm sq. (1.65 inch sq.) | M4GA□F | 20 | 2 | 4.4 | 15 | 1.5 | 3.3 |
| 60 mm sq. (2.36 inch sq.) | MX6G□B(A) | 98 | 10 | 22 | 29 | 3 | 6.6 |
| | MX6G□M(A) | 49 | 5 | 11 | | | |
| 70 mm sq. (2.76 inch sq.) | MX7G□B(A) | 196 | 20 | 44 | 39 | 4 | 8.8 |
| | MX7G□M(A) | 98 | 10 | 22 | | | |
| 80 mm sq. (3.15 inch sq.) | MX8G□B | 294 | 30 | 66 | 49 | 5 | 11 |
| | MX8G□M | 196 | 20 | 44 | | | |
| 90 mm sq. (3.54 inch sq.) | MX9G□B | 392 | 40 | 88 | 98 | 10 | 22 |
| | MX9G□M | 294 | 30 | 66 | | | |
| | MZ9G□B | 588 | 60 | 132 | | | |
| 90 mm sq. (3.54 inch sq.) High torque type | MR9G□B | 784 | 80 | 176 | 147 | 15 | 33 |
| | MP9G□B | | | | | | |
| 90 mm sq. (3.54 inch sq.) Right-angle type | MX9G□R | 392 | 40 | 88 | 98 | 10 | 22 |
| | MZ9G□R | 588 | 60 | 132 | | | |

Service factor

Life expectancy of motor varies depending on load fluctuation. To determine the life expectancy, a factor called service factor, as shown in the table below is used. First choose the appropriate service factor according to the type of load and multiply the result by the required power to determine the design power.

• Service factor

| Type of load | Typical load | Service factor | | |
|---------------|---|----------------|-------------|--------------|
| | | 5 hours/day | 8 hours/day | 24 hours/day |
| Constant | Belt conveyor, One-directional rotation | 0.8 | 1.0 | 1.5 |
| Light-impact | Start/Stop, Cam-drive | 1.2 | 1.5 | 2.0 |
| Medium-impact | Instant FWD/REV, Instant stop | 1.5 | 2.0 | 2.5 |
| Heavy-impact | Frequent medium-impact | 2.5 | 3.0 | 3.5 |

The required allowable shaft torque T_A of the gear head can be determined based on the service factor and actual load torque T_1 :

$$T_A = T_1 \times S_f$$

T_A : Allowable torque of gear head (N·m)
 T_1 : Actual load torque (N·m)
 S_f : Service factor

Use the motor so that the allowable torque T_A calculated from the formula above falls within the allowable torque range.

* Though it seems that the motor can be operated even in overload when the service factor is 0.8, note that the service factor is defined for the allowable torque of the gear head. If the motor is operated in overload, the life of insulator may be shortened or the motor may be burned out due to an abnormal temperature rise.

Standard life expectancy

Standard life expectancy: Standard life expectancy when operated for 8 hours/day at the standard load (Service factor=1.0)

* The oil seal is excluded because it is a consumable.

• Calculation of life expectancy

Calculate the life expectancy while referring to the service factor table shown last page.

When the service factor is 2.0, for example, the life expectancy is calculated as follows:

Life expectancy = 10,000 (h) / 2.0 = 5,000 (h)


• Standard life expectancy

| | Life (hours) |
|--|---------------|
| Ball bearing Decimal gear head | 10,000 hours* |
| Metal bearing Right-angle 42 mm sq. | 2,000 hours |
| for C&B motor | 5,000 hours |

* 5,000 hours when used on reversible motor


Preparation

- (1) Prepare a gear head that matches a motor described in this manual. Use of incompatible gear head will cause malfunction.
- (2) Check O-ring being correctly placed in a right place. If it is not, this may result in grease in the gear head coming out.
- (3) Wipe off any grease on the gear head flange surface.

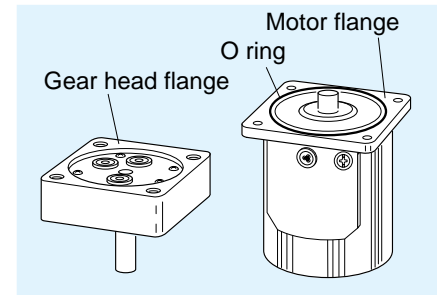


Assembling

- (1) Place the unit so that the motor shaft faces up. Direction of the motor lead and output shaft of gear head must match an application.
- (2) Do not contact a tooth tip of pinion shaft to a tooth tip of gear head. Set each toothes of motor and gear head correctly and gently press and turn the gear head in counter and counter-clockwise.
- (3) To attach the gear head to an application, use the "attaching screws" supplied with the gear head and tighten the screws with appropriate torque and with care not to pinch the O ring, so that the there is no gap between motor flange and gear flange.
- (4) The recommended torque is shown below.

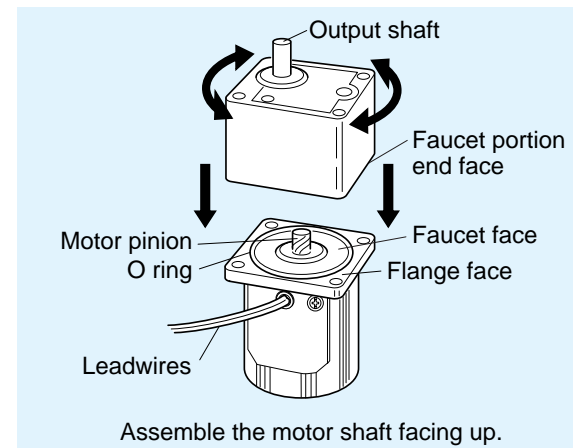


| Size | Screw size | Tightening torque | |
|---------------------------|------------|-------------------|--------------|
| | | N·m | lb-in |
| 42 mm sq. (1.65 inch sq.) | M3 | 0.6 to 1 | 5.31 to 8.85 |
| 60 mm sq. (2.36 inch sq.) | M4 | 2 to 2.5 | 17.7 to 22.1 |
| 70 mm sq. (2.76 inch sq.) | M5 | 2.5 to 3 | 22.1 to 26.6 |
| 80 mm sq. (3.15 inch sq.) | M5 | 2.5 to 3 | 22.1 to 26.6 |
| 90 mm sq. (3.54 inch sq.) | M6 | 3.5 to 4.5 | 31.0 to 39.8 |

- (5) Tighten the screws correctly.

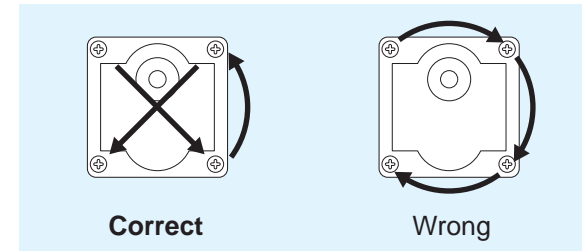

<Note>

Do not forcibly assemble the motor and gear head. Do not damage the tooth of the motor pinion and gear head. Incorrect assembly results in abnormal noise generation or shortened unit life.

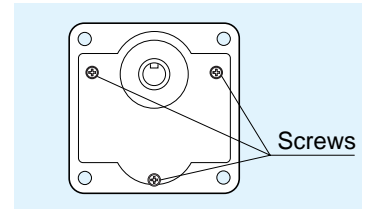

Considerations for installation of gear head

You may experience a slipping gear contact due to broken pinion tooth, locked gear or leaked grease as the gear head life comes closer.


Place a safety device to keep safe operation at any time even if such problems take place.

- Place a drop-proof device in an vertically motioned application like a lifter.
- Place a device to open the door in a door application just in case the gear head is locked.
- Place an oil pan to prevent oil from coming out in an application like food/textile etc.
- Do not place an encoder, sensor, contact, etc near a gear head where the grease may leaking out. If not, please have a protection from grease.
- Have a routain check of the gear head to avoid unexpected accident.

<Precautions>

Keep the gear head attached to the motor. Otherwise, the O ring may become distorted or damaged, causing grease leakage.

- When reassembling, first replace the O ring with a new one.
- When installing a motor associated with the gear head to the application device, temporarily secure the motor and gear head with a tape until assembly completes.

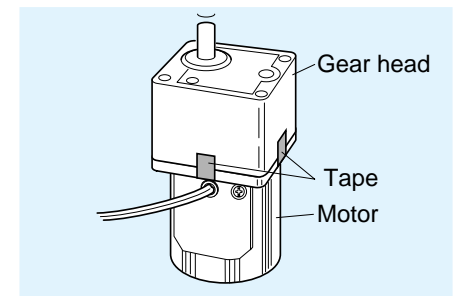

Considerations for storage of gear head

When storing the gear head as a single unit, place it with the output shaft facing down.

(To prevent grease leakage)

Model list of gear head

Gear head

• Ball bearing

| Size | Reduction ratio | Model No. | Hinge | |
|---|--|--|----------------------------------|---|
| 60 mm sq. (2.36 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX6G3BA – MX6G18BA | | |
| | 1/20, 1/25, 1/30, 1/36 | MX6G20BA – MX6G36B | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX6G50B – MX6G180B | | |
| 70 mm sq. (2.76 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX7G3BA – MX7G18BA | | |
| | 1/20, 1/25, 1/30, 1/36 | MX7G20BA – MX7G36B | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX7G50B – MX7G180B | | |
| 80 mm sq. (3.15 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX8G3B – MX8G18B | | |
| | 1/20, 1/25, 1/30, 1/36 | MX8G20B – MX8G36B | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX8G50B – MX8G180B | | |
| 90 mm sq. (3.54 inch sq.) | 40W | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX9G3B – MX9G18B | |
| | | 1/20, 1/25, 1/30, 1/36 | MX9G20B – MX9G36B | |
| | | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX9G50B – MX9G180B | |
| | Common to 60 W, 90 W | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9 | MZ9G3B – MZ9G9B | |
| | | 1/10, 1/12.5, 1/15, 1/18 | MZ9G10B – MZ9G18B | |
| | | 1/20, 1/25, 1/30, 1/36, 1/50, 1/60 | MZ9G20B – MZ9G60B | |
| | | 1/75, 1/90, 1/100, 1/120, 1/150, 1/180, 1/200 | MZ9G75B – MZ9G200B | |
| | | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9 | MY9G3B – MY9G9B | ○ |
| | | 1/10, 1/12.5, 1/15, 1/18 | MY9G10B – MY9G18B | ○ |
| | | 1/20, 1/25, 1/30, 1/36, 1/50, 1/60 | MY9G20B – MY9G60B | ○ |
| 1/75, 1/90, 1/100, 1/120, 1/150, 1/180, 1/200 | MY9G75B – MY9G200B | ○ | | |

* For the specifications for each item, refer to the page of the motor to which it can be applied.

• Metal bearing

| Size | Reduction ratio | Model No. | Hinge | |
|-------------------------------------|--|--|----------------------------------|--|
| 60 mm sq. (2.36 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX6G3MA – MX6G18MA | | |
| | 1/20, 1/25, 1/30, 1/36 | MX6G20MA – MX6G36M | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX6G50M – MX6G180M | | |
| 70 mm sq. (2.76 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX7G3MA – MX7G18MA | | |
| | 1/20, 1/25, 1/30, 1/36 | MX7G20MA – MX7G36M | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX7G50M – MX7G180M | | |
| 80 mm sq. (3.15 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX8G3M – MX8G18M | | |
| | 1/20, 1/25, 1/30, 1/36 | MX8G20M – MX8G36M | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX8G50M – MX8G180M | | |
| 90 mm sq. (3.54 inch sq.) | 40W | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX9G3M – MX9G18M | |
| | | 1/20, 1/25, 1/30, 1/36 | MX9G20M – MX9G36M | |
| | | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX9G50M – MX9G180M | |

* For the specifications for each item, refer to the page of the motor to which it can be applied.

• Ball bearing and metal bearing

| Size | Reduction ratio | Model No. | Hinge |
|-------------------------------------|--|----------------------------------|-------|
| 42 mm sq. (1.65 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/12.5, 1/15, 1/18 | M4GA3F – M4GA18F | |
| | 1/25, 1/30, 1/36, 1/50, 1/60 | M4GA25F – M4GA60F | |
| | 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | M4GA75F – M4GA180F | |

* For the specifications for each item, refer to the page of the motor to which it can be applied.

• High torque gear head

| Size | Reduction ratio | Model No. | Hinge |
|-------------------------------------|---|----------------------------------|-------|
| 90 mm sq. (3.54 inch sq.) | 1/50, 1/60 | MR9G50B – MR9G60B | |
| | 1/75, 1/90, 1/100, 1/120, 1/150, 1/180, 1/200 | MR9G75B – MR9G200B | |
| | 1/50, 1/60 | MP9G50B – MP9G60B | ○ |
| | 1/75, 1/90, 1/100, 1/120, 1/150, 1/180, 1/200 | MP9G75B – MP9G200B | ○ |

• Right-angle gear head

| Size | Reduction ratio | Model No. | Hinge | |
|-------------------------------------|----------------------------|--|----------------------------------|--|
| 90 mm sq. (3.54 inch sq.) | 40W | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/12.5, 1/15, 1/18 | MX9G3R – MX9G18R | |
| | | 1/25, 1/30, 1/36, | MX9G25R – MX9G36R | |
| | | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX9G50R – MX9G180R | |
| | Common to 60 W, 90 W | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/12.5, 1/15, 1/18, 1/25 | MZ9G3R – MZ9G25R | |
| | | 1/30, 1/36, 1/50, 1/60, | MZ9G30R – MZ9G60R | |
| | | 1/75, 1/90, 1/100, 1/120, 1/150, 1/180, 1/200 | MZ9G75R – MZ9G200R | |

• Gear head for C&B motor (Ball bearing)

* The details refer to B-342.

| Size | Reduction ratio | Model No. | Hinge | |
|-------------------------------------|--|--|----------------------------------|---|
| 60 mm sq. (2.36 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX6G3H – MX6G18H | | |
| | 1/20, 1/25, 1/30, 1/36 | MX6G20H – MX6G36H | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX6G50H – MX6G180H | | |
| 70 mm sq. (2.76 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX7G3H – MX7G18H | | |
| | 1/20, 1/25, 1/30, 1/36 | MX7G20H – MX7G36H | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX7G50H – MX7G180H | | |
| 80 mm sq. (3.15 inch sq.) | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX8G3H – MX8G18H | | |
| | 1/20, 1/25, 1/30, 1/36 | MX8G20H – MX8G36H | | |
| | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180, | MX8G50H – MX8G180H | | |
| 90 mm sq. (3.54 inch sq.) | 40W | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9, 1/10, 1/12.5, 1/15, 1/18 | MX9G3H – MX9G18H | |
| | | 1/20, 1/25, 1/30, 1/36 | MX9G20H – MX9G36H | |
| | | 1/50, 1/60, 1/75, 1/90, 1/100, 1/120, 1/150, 1/180 | MX9G50H – MX9G180H | |
| | Common to 60 W, 90 W | 1/3, 1/3.6, 1/5, 1/6, 1/7.5, 1/9 | MY9G3H – MY9G9H | ○ |
| | | 1/10, 1/12.5, 1/15, 1/18, 1/20, 1/25, 1/30, 1/36, 1/50, 1/60 | MY9G10H – MY9G60H | ○ |
| | | 1/75, 1/90, 1/100, 1/120, 1/150, 1/180, 1/200 | MY9G70H – MY9G200H | ○ |

* For the specifications for each item, refer to the page of the motor to which it can be applied.

Gear head accessory

• Ball bearing / Metal bearing / Ball bearing and metal bearing

| Size | Reduction ratio | Model No. | Accessory | | | | Unit: mm (inch) | |
|------------------------------|----------------------------|--------------------|---|---|---------------|---|---|--|
| | | | Screw | Flat washer | Hexagon nut | Key | | |
| 42 mm sq. (1.65 inch sq.) | 1/3 to 1/180 | M4GA3F – M4GA180F | M3P0.5 x 38 (1.50) pan head screw: 2 | For M3P0.5: 2 | M3P0.5: 2 | — | | |
| 60 mm sq. (2.36 inch sq.) | 1/3 to 1/25 | MX6G3BA – MX6G25BA | M4P0.7 x 40 (1.57) pan head screw: 4 | For M4P0.7: 4 | M4P0.7: 4 | — | | |
| | 1/30 to 1/180 | MX6G30B – MX6G180B | M4P0.7 x 50 (1.97) pan head screw: 4 | For M4P0.7: 4 | M4P0.7: 4 | — | | |
| 70 mm sq. (2.76 inch sq.) | 1/3 to 1/25 | MX7G3BA – MX7G25BA | M5P0.8 x 50 (1.97) pan head screw: 4 | For M5P0.8: 4 | M5P0.8: 4 | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | | |
| | 1/30 to 1/180 | MX7G30B – MX7G180B | M5P0.8 x 55 (2.17) pan head screw: 4 | For M5P0.8: 4 | M5P0.8: 4 | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | | |
| 80 mm sq. (3.15 inch sq.) | 1/3 to 1/180 | MX8G3B – MX8G180B | M5P0.8 x 55 (2.17) pan head screw: 4 | For M5P0.8: 4 | M5P0.8: 4 | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | | |
| 90 mm sq. (3.54 inch sq.) | 40W | 1/3 to 1/180 | M6P1.0 x 65 (2.56) pan head screw: 4 | For M6P1.0: 4 | M6P1.0: 4 | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | | |
| | Common to 60 W, 90 W | 1/3 to 1/200 | MZ9G3B – MZ9G200B | M6P1.0 x 85 (3.35) hexagon socket head bolt: 4 | For M6P1.0: 4 | M6P1.0: 4 | 5 x 5 x 25 (0.20 x 0.20 x 0.98) one-end round: 1 | |
| | | 1/3 to 1/200 | MY9G3B – MY9G200B | M6P1.0 x 25 (0.98) hexagon socket head bolt: 4 | For M6P1.0: 4 | M6P1.0: 4 | 5 x 5 x 25 (0.20 x 0.20 x 0.98) one-end round: 1 | |

• Ball bearing / Metal bearing / Ball bearing and metal bearing

| Size | Reduction ratio | Model No. | Accessory | | | | Unit: mm (inch) |
|------------------------------|-----------------|--------------------|---|---------------|-------------|---|-----------------|
| | | | Screw | Flat washer | Hexagon nut | Key | |
| 90 mm sq. (3.54 inch sq.) | 1/50 to 1/200 | MR9G50B – MR9G200B | M6P1.0 x 20 (0.79) hexagon socket head bolt: 4 | For M6P1.0: 4 | — | 6 x 6 x 30 (0.24 x 0.24 x 1.18) one-end round: 1 | |
| | 1/50 to 1/200 | MP9G50B – MP9G200B | M6P1.0 x 25 (0.98) hexagon socket head bolt: 4 | For M6P1.0: 4 | M6P1.0: 4 | 6 x 6 x 30 (0.24 x 0.24 x 1.18) one-end round: 1 | |

• Right-angle gear head

| Size | Reduction ratio | Model No. | Accessory | | | | Unit: mm (inch) |
|------------------------------|-------------------------|--------------|---|---|---------------|---|---|
| | | | Screw | Flat washer | Hexagon nut | Key | |
| 90 mm sq. (3.54 inch sq.) | 40W | 1/3 to 1/180 | M6P1.0 x 20 (0.79) hexagon socket head bolt: 4 | For M6P1.0: 4 | — | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | |
| | Common to 60 W, 90 W | 1/3 to 1/200 | MZ9G3R – MZ9G200R | M6P1.0 x 20 (0.79) hexagon socket head bolt: 4 | For M6P1.0: 4 | — | 5 x 5 x 25 (0.20 x 0.20 x 0.98) one-end round: 1 |

• Gear head for C&B motor

| Size | Reduction ratio | Model No. | Accessory | | | Unit: mm (inch) |
|------------------------------|-----------------|--------------------|---|---------------|---|-----------------|
| | | | Screw | Flat washer | Key | |
| 60 mm sq. (2.36 inch sq.) | 1/3 to 1/18 | MX6G3H – MX6G18H | M4P0.7 x 40 (1.57) pan head screw: 4 | For M4P0.7: 4 | — | |
| | 1/25 to 1/180 | MX6G20H – MX6G180H | M4P0.7 x 50 (1.97) pan head screw: 4 | For M4P0.7: 4 | — | |
| 70 mm sq. (2.76 inch sq.) | 1/3 to 1/18 | MX7G3H – MX7G18H | M5P0.8 x 55 (2.17) pan head screw: 4 | For M5P0.8: 4 | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | |
| | 1/25 to 1/180 | MX7G20H – MX7G180H | M5P0.8 x 65 (2.56) pan head screw: 4 | For M5P0.8: 4 | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | |
| 80 mm sq. (3.15 inch sq.) | 1/3 to 1/18 | MX8G3H – MX8G18H | M5P0.8 x 55 (2.17) pan head screw: 4 | For M5P0.8: 4 | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | |
| | 1/25 to 1/180 | MX8G20H – MX8G180H | M5P0.8 x 65 (2.56) pan head screw: 4 | For M5P0.8: 4 | 4 x 4 x 25 (0.16 x 0.16 x 0.98) one-end round: 1 | |
| 90 mm sq. (3.54 inch sq.) | 1/3 to 1/18 | MX9G3H – MX9G18H | M6P1.0 x 70 (2.76) pan head screw: 4 | For M6P1.0: 4 | 5 x 5 x 25 (0.20 x 0.20 x 0.98) one-end round: 1 | |
| | 1/25 to 1/180 | MX9G20H – MX9G180H | M6P1.0 x 85 (3.35) pan head screw: 4 | For M6P1.0: 4 | 5 x 5 x 25 (0.20 x 0.20 x 0.98) one-end round: 1 | |
| | 1/3 to 1/200 | MY9G3H – MY9G200H | M6P1.0 x 25 (0.98) hexagon socket head bolt: 4 | For M6P1.0: 4 | 5 x 5 x 25 (0.20 x 0.20 x 0.98) one-end round: 1 | |

* Though a hexagon nut is supplied with the accessories, it is not necessary in mounting the gear head.



Decimal gear head (Cannot be used for C&B motor)

| Size | Reduction ratio | Model No. | Applicable gear head | Page | |
|------------------------------|----------------------------|-----------|----------------------|--------------------------------------|-------|
| 60 mm sq. (2.36 inch sq.) | 1/10 | MX6G10XB | MX6G□BA MX6G□B | B-448 | |
| 70 mm sq. (2.76 inch sq.) | 1/10 | MX7G10XB | MX7G□BA MX7G□B | B-448 | |
| 80 mm sq. (3.15 inch sq.) | 1/10 | MX8G10XB | MX8G□B | B-448 | |
| 90 mm sq. (3.54 inch sq.) | 40W | 1/10 | MX9G10XB | MX9G□B | B-448 |
| | Common to 60 W, 90 W | 1/10 | MZ9G10XB | MZ9G□B MY9G□B MR9G□B MP9G□B | B-448 |

• Decimal gear head fixing screw (option: page D-2)

| Size | Reduction ratio | Applicable gear head | Gear fixing screw Model No. | | |
|------------------------------|-----------------|----------------------------|-----------------------------|--------------------------------------|----------------------|
| 60 mm sq. (2.36 inch sq.) | MX6G10XB | MX6G□BA | M0PM4001 | | |
| | | MX6G□B | | | |
| | | MX6G□MA MX6G□M | | | |
| 70 mm sq. (2.76 inch sq.) | MX7G10XB | MX7G□BA | M0PM5001 | | |
| | | MX7G□B | | | |
| | | MX7G□MA MX7G□M | | | |
| 80 mm sq. (3.15 inch sq.) | MX8G10XB | MX8G□B MX8G□M | M0PM5002 | | |
| 90 mm sq. (3.54 inch sq.) | 40W | MX9G10XB | MX9G□B MX9G□M | M0PM6003 | |
| | | Common to 60 W, 90 W | MZ9G10XB | MZ9G□B MY9G□B MR9G□B MP9G□B | M0PM6004 M0PM6002 |

• Type of right-angle gear head
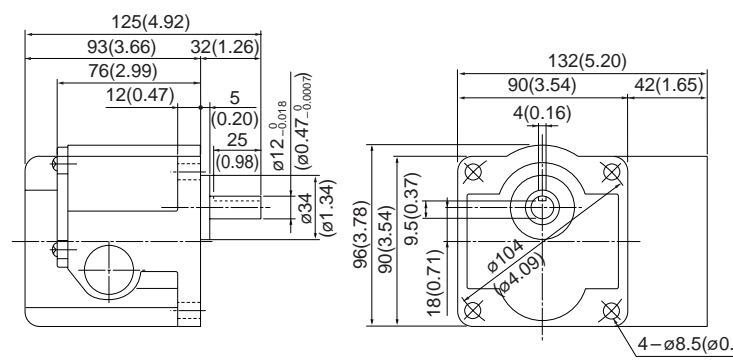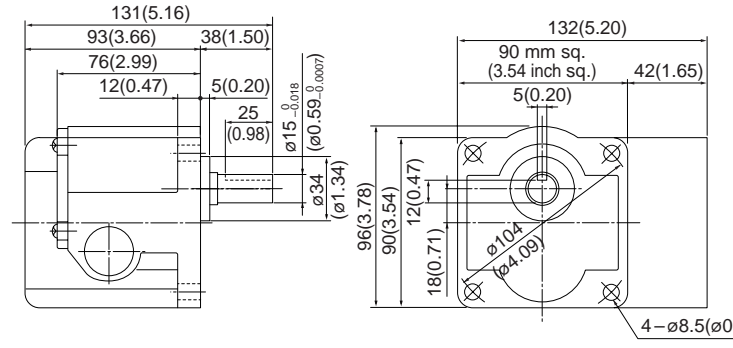
| Model No. | Dimensions | Scale: 1/4, Unit: mm (inch) | Gear fixing screw |
|---------------------------------|--|-----------------------------|--------------------------|
| MX9G□R (Ball bearing) |  | | M6P1.0 x 20(0.79) |
| MZ9G□R (Ball bearing) |  | | M6P1.0 x 20(0.79) |

* Cannot be attached to the C&B motor.

Allowable shaft torque with right-angle type gear head directly connected

* The number of revolutions is calculated based on the synchronous rotating speed (1500 r/min, 1800 r/min). Usually, actual speed is slow by 2 to 20% the value shown in the table, depending on load condition.

• 90 mm sq. (3.54 inch sq.) / 40W

Unit of permissible torque: upper (N·m) / lower (lb-in)

| Reduction ratio | Speed (r/min) | | | | | | | | | | | | | | | | | | | | |
|----------------------|--------------------------------|------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------|-----|------|-----|-----|-------------|
| | 3 | 3.6 | 5 | 6 | 7.5 | 9 | 12.5 | 15 | 18 | 25 | 30 | 36 | 50 | 60 | 75 | 90 | 100 | 120 | 150 | 180 | |
| 50Hz | 500 | 416.7 | 300 | 250 | 200 | 166.7 | 120 | 100 | 83.3 | 60 | 50 | 41.7 | 30 | 25 | 20 | 16.7 | 15 | 12.5 | 10 | 8.3 | |
| 60Hz | 600 | 500 | 360 | 300 | 240 | 200 | 144 | 120 | 100 | 72 | 60 | 50 | 36 | 30 | 24 | 20 | 18 | 15 | 12 | 10 | |
| Applicable gear head | MX9G3R–MX9G180R (ball bearing) | 50Hz | 0.60 (5.31) | 0.72 (6.37) | 0.98 (8.67) | 1.18 (10.4) | 1.47 (13.0) | 1.76 (15.6) | 2.45 (21.7) | 2.94 (26.0) | 3.53 (31.2) | 5.00 (44.3) | 6.00 (53.1) | 7.18 (63.6) | | | | | | | 9.80 (86.7) |
| | | 60Hz | 0.50 (4.43) | 0.60 (5.31) | 0.82 (7.26) | 0.98 (8.67) | 1.23 (10.9) | 1.47 (13.0) | 2.04 (18.1) | 2.45 (21.7) | 2.94 (26.0) | 4.17 (36.9) | 5.00 (44.3) | 5.98 (52.9) | 8.17 (72.3) | | | | | | |
| Rotational direction | | Same as motor rotational direction | | | | | | | | | | | | | | | | | | | |

• Permissible torque at output shaft of gear head using decimal gear head

| Applicable gear head | Bearing | Decimal gear head | Reduction ratio | Speed (r/min) | | | | | | | | | | | | | | | |
|----------------------|----------|------------------------------------|-----------------|---------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--|--|
| | | | | 250 | 300 | 360 | 500 | 600 | 750 | 900 | 1000 | 1200 | 1500 | 1800 | | | | | |
| MX9G25R–MX9G180R | MX9G10XB | Permissible torque | 50Hz | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | | |
| | | | 60Hz | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | 9.80 (86.7) | | |
| Rotational direction | | Same as motor rotational direction | | | | | | | | | | | | | | | | | |

Allowable shaft torque with right-angle type gear head directly connected

* The number of revolutions is calculated based on the synchronous rotating speed (1500 r/min, 1800 r/min). Usually, actual speed is slow by 2 to 20% the value shown in the table, depending on load condition.

• 90 mm sq. (3.54 inch sq.) / 60W

Unit of permissible torque: upper (N·m) / lower (lb-in)

| Reduction ratio | Speed (r/min) | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|--------------------------------|------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|------------|------------|------|-----|-----|-----|--|------------|
| | 3 | 3.6 | 5 | 6 | 7.5 | 9 | 12.5 | 15 | 18 | 25 | 30 | 36 | 50 | 60 | 75 | 90 | 100 | 120 | 150 | 180 | 200 | | |
| 50Hz | 500 | 416.7 | 300 | 250 | 200 | 166.7 | 120 | 100 | 83.3 | 60 | 50 | 41.7 | 30 | 25 | 20 | 16.7 | 15 | 12.5 | 10 | 8.3 | 7.5 | | |
| 60Hz | 600 | 500 | 360 | 300 | 240 | 200 | 144 | 120 | 100 | 72 | 60 | 50 | 36 | 30 | 24 | 20 | 18 | 15 | 12 | 10 | 9 | | |
| Applicable gear head | MZ9G3R–MZ9G200R (ball bearing) | 50Hz | 0.90 (7.97) | 1.15 (10.2) | 1.50 (13.3) | 1.92 (17.0) | 2.20 (19.5) | 2.81 (24.9) | 3.70 (32.7) | 4.40 (38.8) | 5.62 (49.7) | 7.40 (65.5) | 8.80 (77.9) | 11.2 (99.1) | 14.8 (131) | 18.9 (167) | | | | | | | 19.6 (173) |
| | | 60Hz | 0.70 (6.20) | 0.90 (7.97) | 1.17 (10.4) | 1.50 (13.3) | 1.72 (15.2) | 2.20 (19.5) | 2.90 (25.7) | 3.44 (30.4) | 4.40 (38.9) | 5.79 (51.2) | 7.40 (65.5) | 8.80 (77.9) | 11.6 (103) | 14.8 (131) | 15.3 (135) | | | | | | |
| Rotational direction | | Same as motor rotational direction | | | | | | | | | | | | | | | | | | | | | |

• Permissible torque at output shaft of gear head using decimal gear head

| Applicable gear head | Bearing | Reduction ratio | Speed (r/min) | Permissible torque | | | | | | | | | | | | | | | |
|----------------------|----------|----------------------|---------------|------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|--|--|
| | | | | 250 | 300 | 360 | 500 | 600 | 750 | 900 | 1000 | 1200 | 1500 | 1800 | 2000 | | | | |
| MX9G10XB | MX9G10XB | 50Hz | 6 | 5 | 4.2 | 3 | 2.5 | 2 | 1.7 | 1.5 | 1.3 | 1 | 0.83 | 0.75 | | | | | |
| | | 60Hz | 7.2 | 6 | 5 | 3.6 | 3 | 2.4 | 2 | 1.8 | 1.5 | 1.2 | 1 | 0.9 | | | | | |
| MZ9G25R–MZ9G200R | MZ9G10XB | Permissible torque | N·m (lb-in) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | | |
| | | Rotational direction | | Same as motor rotational direction | | | | | | | | | | | | | | | |

• 90 mm sq. (3.54 inch sq.) / 90W

Unit of permissible torque: upper (N·m) / lower (lb-in)

| Reduction ratio | Speed (r/min) | | | | | | | | | | | | | | | | | | | | |
|----------------------|--------------------------------|------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|------------|------|-----|------|-----|-----|------------|
| | 3 | 3.6 | 5 | 6 | 7.5 | 9 | 12.5 | 15 | 18 | 25 | 30 | 36 | 50 | 60 | 75 | 90 | 100 | 120 | 150 | 180 | 200 |
| 50Hz | 500 | 416.7 | 300 | 250 | 200 | 166.7 | 120 | 100 | 83.3 | 60 | 50 | 41.7 | 30 | 25 | 20 | 16.7 | 15 | 12.5 | 10 | 8.3 | 7.5 |
| 60Hz | 600 | 500 | 360 | 300 | 240 | 200 | 144 | 120 | 100 | 72 | 60 | 50 | 36 | 30 | 24 | 20 | 18 | 15 | 12 | 10 | 9 |
| Applicable gear head | MZ9G3R–MZ9G200R (ball bearing) | 50Hz | 1.30 (11.5) | 1.59 (14.1) | 2.30 (20.4) | 2.82 (25.0) | 3.30 (29.2) | 4.05 (35.8) | 5.60 (49.6) | 6.80 (60.2) | 8.34 (73.8) | 10.6 (93.8) | 12.7 (112) | 15.6 (138) | | | | | | | 19.6 (173) |
| | | 60Hz | 1.06 (9.38) | 1.30 (11.5) | 1.88 (16.6) | 2.30 (20.4) | 2.69 (23.8) | 3.30 (29.2) | 4.56 (40.4) | 5.54 (49.0) | 6.80 (60.2) | 8.15 (72.1) | 10.6 (93.8) | 12.7 (112) | 16.0 (142) | | | | | | |
| Rotational direction | | Same as motor rotational direction | | | | | | | | | | | | | | | | | | | |






• Permissible torque at output shaft of gear head using decimal gear head

| Applicable gear head | Bearing | Reduction ratio | Speed (r/min) | Permissible torque | | | | | | | | | | | | | | | | | |
|----------------------|----------|----------------------|---------------|------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| | | | | 250 | 300 | 360 | 500 | 600 | 750 | 900 | 1000 | 1200 | 1500 | 1800 | 2000 | | | | | | |
| MX9G10XB | MX9G10XB | 50Hz | 6 | 5 | 4.2 | 3 | 2.5 | 2 | 1.7 | 1.5 | 1.3 | 1 | 0.83 | 0.75 | | | | | | | |
| | | 60Hz | 7.2 | 6 | 5 | 3.6 | 3 | 2.4 | 2 | 1.8 | 1.5 | 1.2 | 1 | 0.9 | | | | | | | |
| MZ9G25R–MZ9G200R | MZ9G10XB | Permissible torque | N·m (lb-in) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) | 19.6 (173) |
| | | Rotational direction | | Same as motor rotational direction | | | | | | | | | | | | | | | | | |

Induction motor
 Reversible motor
 3-phase motor
 Electromagnetic brake motor
 Variable speed induction motor
 Variable speed reversible motor
 Variable speed electronic brake single-phase motor
 Variable speed unit motor
 C&B motor
 2-pole round shaft motor
 Gear head
 Gear head -inch (U.S.A.)

• Type of decimal gear head

* The decimal gear head fixing screw is sold separately. * Shown in □ is a gear ratio.
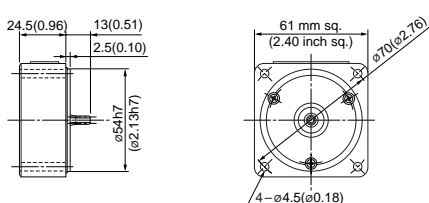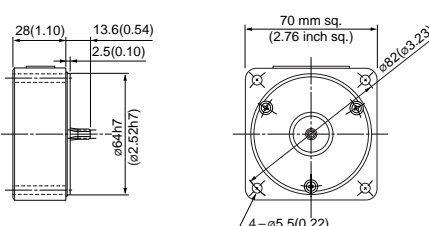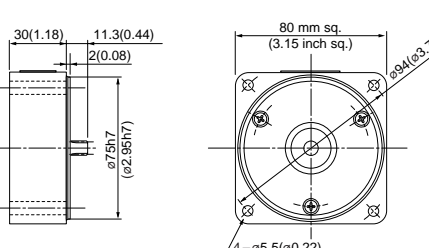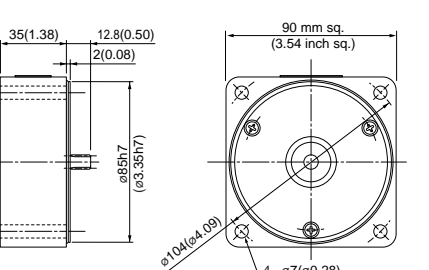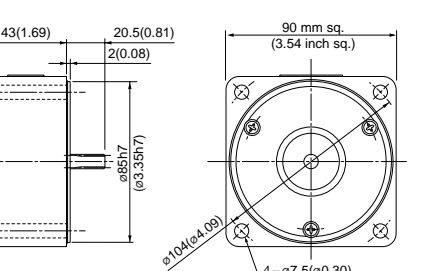
| Model No. | Dimensions | Scale: 1/4, Unit: mm (inch) | Applicable gear head | Gear fixing screw (option) |
|-----------|---|-----------------------------|--|--|
| MX6G10XB |  | | MX6G□BA MX6G□B MX6G□MA MX6G□M | M0PM4001 • M4P0.7 x 85(3.35) • Cross recessed pan head screw |
| | | | | |
| MX7G10XB |  | | MX7G□BA MX7G□B MX7G□MA MX7G□M | M0PM5001 • M5P0.8 x 95(3.74) • Cross recessed pan head screw |
| | | | | |
| MX8G10XB |  | | MX8G□B MX8G□M | M0PM5002 • M5P0.8 x 85(3.35) • Cross recessed pan head screw |
| | | | | |
| MX9G10XB |  | | MX9G□B MX9G□M | M0PM6003 • M6P1.0 x 100(3.94) • Cross recessed pan head screw |
| | | | | |
| MZ9G10XB |  | | MZ9G□B | M0PM6004 • M6P1.0 x 125(4.92) • Hexagon socket head bolt |
| | | | MY9G□B MP9G□B MR9G□B | |

* Fit tolerance symbol is used in the outside dimension diagram of motor and gear head.
 For further information, see "Fit tolerance" on page A-35.

* Please read your User's manual carefully so that you will understand the operation and safety precautions before attempting to operate the system.