

ENG

PRESSURE TRANSDUCERS AND TRANSMITTERS



GEFRAN

BEYOND TECHNOLOGY



GEFRAN

BEYOND TECHNOLOGY

More than fifty years of experience, and being an organisation with a strong focus on the customer's needs and constant technological innovation have made Gefran a benchmark in the design and production of sensors, systems and components for industrial process automation and control. Expertise, flexibility and process quality are the factors that distinguish Gefran in the production of integrated tools and systems for specific applications in various fields of industry, with consolidated know-how in the plastics, mobile hydraulics, heating and lift sectors. Technology, innovation and versatility represent the catalogue's added value, in addition to the ability to create specific application solutions in association with the world's leading machine manufacturers.

PRESSURE TRANSDUCERS

A pressure transducer is an electronic device that transforms a physical variable (pressure) into an electrical signal (current or voltage), acquired by various control, measurement and regulation devices such as controllers or PLCs.

Gefran sensors are capable of measuring fluid and gas pressure in all applications required by the industry.

The Gefran Group relies on a unit dedicated exclusively to the design and production of a full range of sensors capable of measuring pressure, displacement, force, humidity and temperature. Based on know-how gained over years of activity in the field of sensors, Gefran guarantees:

- Total control of the production process, from the design of the sensitive element to the production of precision mechanical parts, ensuring high standards of quality, reliability and precision of the finished product.
- The constant updating of technologies and solutions meets the specific needs of the customer. Automated production lines use sophisticated pressure controllers making it possible to work with gas at an absolute pressure of up to 40 bar and oil up to 5000 bar.
- Effective product research and development. Gefran offers a complete range of measurement from 0...50 mbar to 0...5000bar, for relative and absolute pressures.

Gefran is one of the few companies at an international level that has developed the know-how to produce sensitive elements based on the following technologies in its Technological Pole:

- Thick film on steel;
- Glued strain gauge;
- Silicon piezoresistive.

Gefran pressure transducers are the result of years of experience and close collaboration with the best European universities as well as the company's own customers. Each transducer has been designed and manufactured with characteristics aimed at satisfying the requirements of its particular application.




KS, KH, KHC PRESSURE TRANSDUCERS



TPFADA, TPFAS FLUSH DIAPHRAGM PRESSURE TRANSDUCERS



TPHADA HIGH PRESSURE TRANSDUCERS

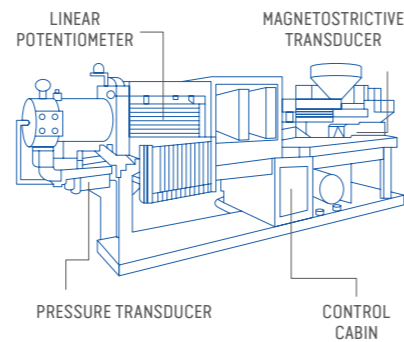

PLASTIC INJECTION PRESS

APPLICATION SECTORS



PLASTIC AND RUBBER INJECTION PRESSES



BLOW MOULDING MACHINES



MATERIALS PROCESSING



HYDRAULICS AND HYDRAULIC POWER PACKS



FARMING AND EARTHMOVING MACHINERY



AUTOMOTIVE TEST BENCHES ENGINE TEST ROOMS



STEAM TREATMENT PLANTS



FOOD INDUSTRY



EQUIPMENT TEST BENCHES



MATERIALS TESTING MACHINES



HEAT EXCHANGE SYSTEMS



ATEX: INTRINSIC SAFETY METHANE GAS DISTRIBUTION SYSTEMS METHANE GAS COMPRESSORS

WIDE RANGE OF PRODUCTS FOR EVERY APPLICATION


Gefran offers an extensive range of transducers for pressure measurement in all industrial applications. Models are available for special and high-precision applications, also for use in particularly heavy duty and demanding environments, such as mobile vehicles.

The TPF/TPFADA series adopts a state-of-the-art technical solution with a very sturdy flush steel measuring diaphragm.

This makes the product unique and particularly suitable for pressure measurement in very dense and aggressive fluids and pastes.

In addition, the new TPFAS series introduces new membranes miniaturised up to Ø 8.6 mm which are the smallest of their kind on the market.

The TPH/TPHADA series, with its monolithic measuring diaphragm structure, is the ideal product for very high pressure measurements, up to 5000 bar, even with high dynamic push- button pressure.

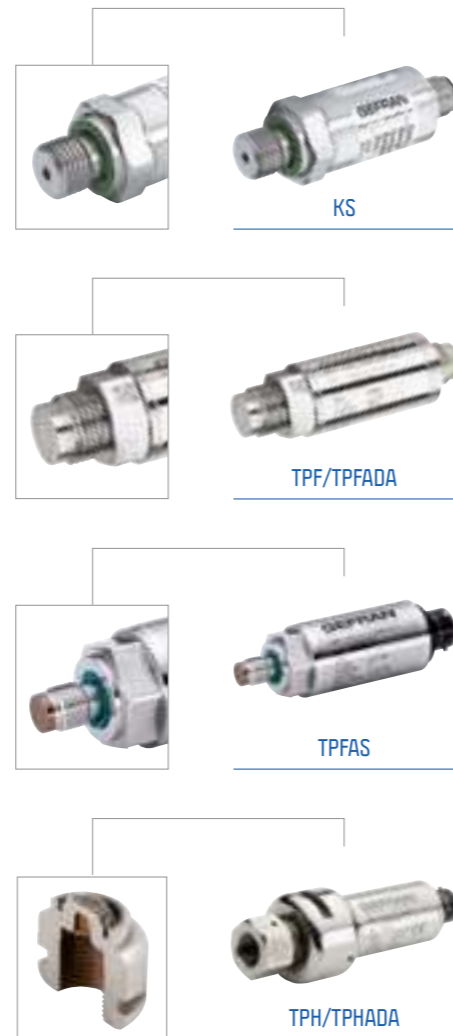


	KS	KH	KHC	KX	TK	TKDA	TSA	TPS	TPSA	TPSADA	TPH	TPHADA	TPF	TPFADA	TPFAS
4-20mA	X	X		X	X	X	X		X	X		X		X	X
0-10Vdc	X	X			X	X	X		X	X		X		X	X
RATIOMETRIC mV/V								X			X		X		
CAN OPEN - SAE 1939	X		X												
SIL2	X	X		X											
cULus	X													X	
ATEX				X											
EAC EX				X											
AUTOZERO						X				X				X	X

ANALOGUE OR DIGITAL ELECTRICAL OUTPUT?

GEFRAN manufactures both transmitters and transducers with the following electrical outputs:

ANALOGUE

- Ratiometric
- 4...20mA
- 0.5...4.5Vdc, 0...5Vdc, 0...10Vdc



DIGITAL

- Can Open CiA DP 3.01 rel.4.0 and DS406 with the following special features -
Selectable baud rate from 10KBaud to 1MBaud
- Can SAE J1939 multi-PDU approach (CiA 602-2) - 14 bit digital resolution



MEASUREMENT RANGES

Gefran sensors are capable of measuring fluid and gas pressure in all applications required by the industry.

Gefran offers a complete range for measurement from 0...50 mbar to 0...5000bar, for relative and absolute pressures.

MODEL	PRESSURE	KS	KX	KH	KHC	TK TKDA	TSA	TPS	TPSA TPSADA	TPF	TPH	TPHADA	TPF TPFADA	TPFAS
CAMPO MIN.	BAR	0..1	±1	0..4	0..4	±1	0.0,05	0..10	0..4	0..10	0..1000	0..1000	0..10	0..25
	PSI	0..15	±15	0..60	0..60	±15	0..5	0..150	0..60	0..150	0..15000	0..15000	0..150	0..350
CAMPO MAX.	BAR	0..1000	0..1000	0..1000	0..1000	0..1000	0..60	0..1000	0..1000	0..1000	0..5000	0..5000	0..1000	0..600
	PSI	0..15000	0..15000	0..15000	0..15000	0..1500	0..1000	0..15000	0..15000	0..15000	0..70000	0..70000	0..15000	0..9000

PRESSURES FROM 0...50MBAR TO 0...5000 BAR

TECHNOLOGY

Gefran uses one of the most widespread and proven existing measurement principles, the so-called "Wheatstone Bridge". There are a number of different technologies for making the sensitive element on the basis of this principle.

THICK FILM ON STEEL TECHNOLOGY

Using the "screen printing process" technique, the insulating layers (dielectric), the conductive layer (cermet) and the resistive layer are deposited on the steel membrane to create the "Wheatstone bridge". The thickness of the membrane determines the measurement range, and the step-by-step transition from 200°C to 900°C makes the sensor extremely robust and reliable.




EXTENSIMETRIC TECHNOLOGY



"Glued strain gauge" technology, originally developed by Gefran, is one of the most widely used methods in the construction of pressure sensors for its versatility of application, reliability and precision. The measuring element (resistance) consists of an ultra-thin sheet of metal alloy, chemically etched using the process employed in printed circuit boards. It is glued to the steel diaphragm using sophisticated techniques following careful positioning of the strain gauge to ensure perfect adhesion to the surface and the necessary linearity.

SILICON PIEZORESISTIVE TECHNOLOGY

Silicon piezoresistive technology is characterized by the complex and delicate step of installing the chip (solid state Wheatstone bridge) in the metal substrate and the metal separation membrane, interposing silicone insulation oil (filling) in a vacuum. With this technology, the measurement range of Gefran sensors can also be very low (0-50 mbar), with high precision and overpressure capability.



SIL2: FUNCTIONAL SAFETY

The new **KS** series represents the **best solution for all applications**, both hydraulic and pneumatic, requiring a pressure transducer and offering not only competitive price but also high performance and **reliability**. The KS series is supplied with SIL2 certification according to IEC/EN 62061 in accordance with Machinery Directive 2006/42/EC. The KH series for applications on mobile vehicles and the KX series for potentially explosive areas are also available with the same SIL2 certification.



PFD (PROBABILITY OF FAILURE ON DEMAND)	PFH (PROBABILITY OF FAILURES FOR HOUR)	SIL EN 61508 EN 62061	PL EN 13849-1	RISK REDUCTION FACTOR
10 ⁻² < PFD < 10 ⁻¹	10 ⁻⁶ < PFH < 10 ⁻⁵	1	B,C	10 TO 100
10 ⁻³ < PFD < 10 ⁻²	10 ⁻⁷ < PFH < 10 ⁻⁶	2	D	100 TO 1.000
10 ⁻⁴ < PFD < 10 ⁻³	10 ⁻⁸ < PFH < 10 ⁻⁷	3	E	1000 TO 10.000

The concepts Safety Integrity Level (SIL) and Performance Level (PL) describe the ability of the control and command system to reduce the risk factor, in terms of safety.

ATEX: SICUREZZA INTRINSECA

Gefran's range of pressure sensors includes pressure transmitters in **ATEX versions ideal for applications in potentially explosive atmospheres**. ATEX Directive 2014/34/EU refers to electrical and mechanical equipment and protective systems that can be used in potentially explosive atmospheres (flammable gases, vapours and dusts), even under extreme conditions. The KX series is III G Ex ia IIC T4, T5 and T6 certified and covers measurement ranges of ±1 bar at 0...1000bar, with operation from -40°C to +80°C. To guarantee maximum safety and reliability, the KX series is also SIL2 (Functional Safety) certified, and is therefore applicable in safety equipment that can be installed in potentially explosive atmospheres.




AUTOZERO & SPAN

The Autozero & Span function permits simple, and effective adjustment of the pressure transducer zero as well as full scale using a magnetic pen. Simply place the pen on the contact point identified by the symbol for a few seconds and the operation is complete, with no need to open or disassemble the transducer. The Digital Autozero & Span function is optional.



PRESSURE TRANSDUCERS

MAIN TECHNICAL CHARACTERISTICS



MODEL	KS	KH	KHC																																																																																																																																																																														
MEASUREMENT RANGES	0...1 a 0...1000 bar (0...15 a 0...15000 psi)	4...1000 bar (60...15000 psi)	4...1000 bar (60...15000 psi)																																																																																																																																																																														
ACCURACY	<± 0,5% FS	<± 0,5% FS	<± 0,5% FS																																																																																																																																																																														
NON-LINEARITY	+/- 0,15% FS (typical)	+/- 0,15% FS (typical)	+/- 0,15% FS (typical)																																																																																																																																																																														
OVERPRESSURE	2x	2x	2x																																																																																																																																																																														
BURST STRENGTH	4x	4x	4x																																																																																																																																																																														
SAMPLING TIME	< 1 msec.	< 1 msec	< 1 msec																																																																																																																																																																														
MEASURING PRINCIPLE PROPERTIES	Thick film of sensitive element deposited on steel membrane	Thick film of sensitive element deposited on steel membrane	Thick film of sensitive element deposited on steel membrane																																																																																																																																																																														
OPERATING TEMPERATURE (PROCESS) RANGE	-40...+125°C (-40...+257°F)	-40...+125°C (-40...+257°F)	-40...+125°C (-40...+257°F)																																																																																																																																																																														
COMPENSATED TEMPERATURE RANGE	-20...+85°C (-4...+185°F)	-20...+85°C (-4...+185°F)	-20...+85°C (-4...+185°F)																																																																																																																																																																														
ZERO DRIFT IN COMPENSATED FIELD	± 0,01% FS/°C typical (± 0,02% FS/°C max.)	± 0,01% FS/°C typical (± 0,02% FS/°C max.)	± 0,01% FS/°C typical (± 0,02% FS/°C max.)																																																																																																																																																																														
TRANSDUCER BODY CONSTRUCTION MATERIAL	Stainless steel	Stainless steel	Stainless steel																																																																																																																																																																														
PARTS IN CONTACT WITH THE PROCESS	Fluids compatible with AISI 430F and 17-4 PH stainless steel	Fluids compatible with AISI 430F and 17-4 PH stainless steel	Fluids compatible with AISI 430F and 17-4 PH stainless steel																																																																																																																																																																														
ELECTRICAL CONNECTIONS	4-pin microDIN connector (P8) (C) 4-pin M12x1 connector (Z) 4-pin DIN connector (P18) (E) 2/3 pole shielded cable (1m) (F)	4-pin M12x1 connector (Z) 3-pin connector - EN 175301-803 (E) 3 pole shielded cable (1m) (F) 4-pin Deutsch DT04 connector (G) 3-pin AMP Superseal 1.5 connector (S) 3-pin Metri-Pack 150 connector (K) 3-pin Deutsch DT04 connector (D)	5-pin M12x1 connector (A)																																																																																																																																																																														
OUTPUT SIGNAL	Analogue 0.1...5.1Vdc 0.1...10.1Vdc 4...20 mA 0...5 Vdc* 0...10 Vdc* 1...5 Vdc 1...6 Vdc * SIL2 certification not available	Analogue 0...10 Vdc* (3 wires) 4...20mA (2 wires) 0.5...4.5 V ratiometric * SIL2 certification not available	Digital CANopen J1939																																																																																																																																																																														
MEASUREMENT RANGES	<table border="1"> <thead> <tr> <th>bar</th> <th>1"</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B01U</td><td>1"</td><td>B04D</td><td>40</td><td>B04U</td><td>4</td></tr> <tr><td>B1V6</td><td>1,6"</td><td>B06D</td><td>60</td><td>B06U</td><td>6</td></tr> <tr><td>B2V5</td><td>2,5"</td><td>B01C</td><td>100</td><td>B01D</td><td>10</td></tr> <tr><td>B04U</td><td>4</td><td>B16D</td><td>160</td><td>B01D</td><td>10</td></tr> <tr><td>B06U</td><td>6</td><td>B02C</td><td>200</td><td>B16U</td><td>16</td></tr> <tr><td>B01D</td><td>10</td><td>B25D</td><td>250</td><td>B02D</td><td>20</td></tr> <tr><td>B16U</td><td>16</td><td>B04C</td><td>400</td><td>B02D</td><td>20</td></tr> <tr><td>B02D</td><td>20</td><td>B06C</td><td>600</td><td>B04D</td><td>40</td></tr> <tr><td>B25U</td><td>25</td><td>B01M</td><td>1000</td><td>B04D</td><td>40</td></tr> </tbody> </table>	bar	1"	bar	bar	bar	bar	B01U	1"	B04D	40	B04U	4	B1V6	1,6"	B06D	60	B06U	6	B2V5	2,5"	B01C	100	B01D	10	B04U	4	B16D	160	B01D	10	B06U	6	B02C	200	B16U	16	B01D	10	B25D	250	B02D	20	B16U	16	B04C	400	B02D	20	B02D	20	B06C	600	B04D	40	B25U	25	B01M	1000	B04D	40	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B06D</td><td>60</td><td>B01C</td><td>100</td><td>B04U</td><td>4</td></tr> <tr><td>B01D</td><td>10</td><td>B16D</td><td>160</td><td>B06U</td><td>6</td></tr> <tr><td>B02C</td><td>200</td><td>B01D</td><td>10</td><td>B16D</td><td>160</td></tr> <tr><td>B16U</td><td>16</td><td>B02C</td><td>200</td><td>B01D</td><td>10</td></tr> <tr><td>B02D</td><td>20</td><td>B25D</td><td>250</td><td>B16U</td><td>16</td></tr> <tr><td>B04C</td><td>400</td><td>B04C</td><td>400</td><td>B02D</td><td>20</td></tr> <tr><td>B06C</td><td>600</td><td>B25U</td><td>250</td><td>B04C</td><td>400</td></tr> <tr><td>B01M</td><td>1000</td><td>B04D</td><td>40</td><td>B06C</td><td>600</td></tr> <tr><td>B06D</td><td>60</td><td>B01M</td><td>1000</td><td>B01M</td><td>1000</td></tr> </tbody> </table>	bar	bar	bar	bar	bar	bar	B06D	60	B01C	100	B04U	4	B01D	10	B16D	160	B06U	6	B02C	200	B01D	10	B16D	160	B16U	16	B02C	200	B01D	10	B02D	20	B25D	250	B16U	16	B04C	400	B04C	400	B02D	20	B06C	600	B25U	250	B04C	400	B01M	1000	B04D	40	B06C	600	B06D	60	B01M	1000	B01M	1000	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B04U</td><td>4</td><td>B01C</td><td>100</td><td>B04U</td><td>4</td></tr> <tr><td>B06U</td><td>6</td><td>B16D</td><td>160</td><td>B06U</td><td>6</td></tr> <tr><td>B01D</td><td>10</td><td>B02C</td><td>200</td><td>B01D</td><td>10</td></tr> <tr><td>B16U</td><td>16</td><td>B25D</td><td>250</td><td>B16U</td><td>16</td></tr> <tr><td>B02D</td><td>20</td><td>B04C</td><td>400</td><td>B02D</td><td>20</td></tr> <tr><td>B04C</td><td>400</td><td>B25U</td><td>250</td><td>B04C</td><td>400</td></tr> <tr><td>B06C</td><td>600</td><td>B04D</td><td>40</td><td>B06C</td><td>600</td></tr> <tr><td>B01M</td><td>1000</td><td>B04D</td><td>40</td><td>B01M</td><td>1000</td></tr> </tbody> </table>	bar	bar	bar	bar	bar	bar	B04U	4	B01C	100	B04U	4	B06U	6	B16D	160	B06U	6	B01D	10	B02C	200	B01D	10	B16U	16	B25D	250	B16U	16	B02D	20	B04C	400	B02D	20	B04C	400	B25U	250	B04C	400	B06C	600	B04D	40	B06C	600	B01M	1000	B04D	40	B01M	1000
bar	1"	bar	bar	bar	bar																																																																																																																																																																												
B01U	1"	B04D	40	B04U	4																																																																																																																																																																												
B1V6	1,6"	B06D	60	B06U	6																																																																																																																																																																												
B2V5	2,5"	B01C	100	B01D	10																																																																																																																																																																												
B04U	4	B16D	160	B01D	10																																																																																																																																																																												
B06U	6	B02C	200	B16U	16																																																																																																																																																																												
B01D	10	B25D	250	B02D	20																																																																																																																																																																												
B16U	16	B04C	400	B02D	20																																																																																																																																																																												
B02D	20	B06C	600	B04D	40																																																																																																																																																																												
B25U	25	B01M	1000	B04D	40																																																																																																																																																																												
bar	bar	bar	bar	bar	bar																																																																																																																																																																												
B06D	60	B01C	100	B04U	4																																																																																																																																																																												
B01D	10	B16D	160	B06U	6																																																																																																																																																																												
B02C	200	B01D	10	B16D	160																																																																																																																																																																												
B16U	16	B02C	200	B01D	10																																																																																																																																																																												
B02D	20	B25D	250	B16U	16																																																																																																																																																																												
B04C	400	B04C	400	B02D	20																																																																																																																																																																												
B06C	600	B25U	250	B04C	400																																																																																																																																																																												
B01M	1000	B04D	40	B06C	600																																																																																																																																																																												
B06D	60	B01M	1000	B01M	1000																																																																																																																																																																												
bar	bar	bar	bar	bar	bar																																																																																																																																																																												
B04U	4	B01C	100	B04U	4																																																																																																																																																																												
B06U	6	B16D	160	B06U	6																																																																																																																																																																												
B01D	10	B02C	200	B01D	10																																																																																																																																																																												
B16U	16	B25D	250	B16U	16																																																																																																																																																																												
B02D	20	B04C	400	B02D	20																																																																																																																																																																												
B04C	400	B25U	250	B04C	400																																																																																																																																																																												
B06C	600	B04D	40	B06C	600																																																																																																																																																																												
B01M	1000	B04D	40	B01M	1000																																																																																																																																																																												
PROTECTION CLASS (IEC 529) (WITH FEMALE CONNECTOR MOUNTED)	IP65/IP67	IP65/IP67	IP67/IP69K																																																																																																																																																																														
PROCESS CONNECTIONS	G 1/4 gas male (DIN 3852-E) (E) G 1/2 gas male (DIN 3852-E) (3)	G 1/4 gas male (DIN 3852-E) (E) 1/4-18 NPT male (7)	G1/4 gas male (DIN 3852-E) (E) 1/4-18 NPT male (7)																																																																																																																																																																														
MAIN APPLICATIONS	- Industrial automation - Compressors - Hydraulic power units - Plastic injection presses - Hydraulic presses - Hydraulic systems - Pumps	- Agricultural vehicles - Railways - Municipalities - Mining - Construction - Mobile hydraulics	- Agricultural vehicles - Municipalities - Mining - Construction - Mobile hydraulics																																																																																																																																																																														



PRESSURE TRANSDUCERS AND TRANSMITTERS



MODEL	KX	TK	TKDA																																																																																																																																																																																																																																																																																				
MEASUREMENT RANGES	-1...1 a 0...1000 bar (-15...15 a 0...15000 psi)	0...1000bar 0...15000psi	0...1000bar 0...15000psi																																																																																																																																																																																																																																																																																				
ACCURACY	+/- 0,15% FS (typical)	H ± 0,25% FS (typical) M ± 0,5% FS (typical)	H ± 0,25% FS (typical) M ± 0,5% FS (typical)																																																																																																																																																																																																																																																																																				
OVERPRESSURE	2x	2x	2x																																																																																																																																																																																																																																																																																				
BURST STRENGTH	4x	4x	4x																																																																																																																																																																																																																																																																																				
SAMPLING TIME	< 1 msec	< 1 msec	< 1 msec																																																																																																																																																																																																																																																																																				
MEASURING PRINCIPLE PROPERTIES	Thick film of sensitive element deposited on steel membrane	Thick film of sensitive element deposited on steel membrane	Thick film of sensitive element deposited on steel membrane																																																																																																																																																																																																																																																																																				
OPERATING TEMPERATURE (PROCESS) RANGE	-40...+125°C (-40...+257°F)	-40...+105°C (-40...+221°F)	-40...+105°C (-40...+221°F)																																																																																																																																																																																																																																																																																				
COMPENSATED TEMPERATURE RANGE	-20...+85°C (-4...+185°F)	-10...+85°C (+14...+185°F)	-10...+85°C (+14...+185°F)																																																																																																																																																																																																																																																																																				
ZERO DRIFT IN COMPENSATED FIELD	± 0,01% FS/°C	± 0,012% FS/°C (typical)	± 0,012% FS/°C (typical)																																																																																																																																																																																																																																																																																				
TRANSDUCER BODY CONSTRUCTION MATERIAL	Steel	Stainless steel	Stainless steel																																																																																																																																																																																																																																																																																				
PARTS IN CONTACT WITH THE PROCESS	Fluids compatible with AISI 430F and 17-4 PH stainless steel	Fluids compatible with AISI 430F and 17-4 PH stainless steel	Fluids compatible with AISI 430F and 17-4 PH stainless steel																																																																																																																																																																																																																																																																																				
ELECTRICAL CONNECTIONS	7-pin M16x0.75 connector (P) 6-pin connector (V) 2 pole 2x0.25 shielded cable (1m) (F) 4-pin solenoid valve connector (E) 4-pin micro-solenoid valve connector (M) 4-pin M12x1 connector (Z)	7-pin connector (P) 6-pin connector (V) 2x0.25 shielded cable (2m) (F) 4-pin 4x0.25 shielded cable (2m) (F) 4-pin M12x1 connector (Z) 4-pin solenoid valve connector (E) 4-pin micro-solenoid valve connector (M)	7-pin connector (P) 6-pin connector (V) 2x0.25 shielded cable (2m) (F) 4-pin 4x0.25 shielded cable (2m) (F) 4-pin M12x1 connector (Z) 4-pin solenoid valve connector (E) 4-pin micro-solenoid valve connector (M)																																																																																																																																																																																																																																																																																				
OUTPUT SIGNAL	Analogue 4-20 mA	Analogue 4...20mA (two wires) 0.1...5.1Vdc 0.1...10.1Vdc 0...5Vdc 0...10Vdc 1...5Vdc 1...10Vdc	Analogue 4...20mA (two wires) 0.1...5.1Vdc 0.1...10.1Vdc 0...5Vdc 0...10Vdc 1...5Vdc 1...10Vdc																																																																																																																																																																																																																																																																																				
MEASUREMENT RANGES	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>N01U</td><td>-1...+1</td><td>B16U</td><td>16</td><td>N01U</td><td>-1...+1 *</td></tr> <tr><td>N1V6</td><td>-1...+1,6</td><td>B02D</td><td>20</td><td>N02U</td><td>-1...+2 *</td></tr> <tr><td>N02U</td><td>-1...+2</td><td>B25U</td><td>25</td><td>N03U</td><td>-1...+3 *</td></tr> <tr><td>N2V5</td><td>-1...+2,5</td><td>B04D</td><td>40</td><td>N05U</td><td>-1...+5</td></tr> <tr><td>N04U</td><td>-1...+4</td><td>B06D</td><td>60</td><td>N01D</td><td>-1...+10</td></tr> <tr><td>N06U</td><td>-1...+6</td><td>B01C</td><td>100</td><td>B03U</td><td>0.3</td></tr> <tr><td>N01D</td><td>-1...+10</td><td>B16D</td><td>160</td><td>B04U</td><td>0.4</td></tr> <tr><td>B02U</td><td>2</td><td>B02C</td><td>200</td><td>B05U</td><td>0.5</td></tr> <tr><td>B2V5</td><td>2,5</td><td>B25D</td><td>250</td><td>B06U</td><td>0.6</td></tr> <tr><td>B04U</td><td>4</td><td>B04C</td><td>400</td><td>B07U</td><td>0.7</td></tr> <tr><td>B06U</td><td>6</td><td>B06C</td><td>600</td><td>B01D</td><td>0.10</td></tr> <tr><td>B01D</td><td>10</td><td>B01M</td><td>1000</td><td>B16U</td><td>0.16</td></tr> <tr><td></td><td></td><td></td><td></td><td>B02D</td><td>0.20</td></tr> <tr><td></td><td></td><td></td><td></td><td>B25U</td><td>0.25</td></tr> </tbody> </table>	bar	bar	bar	bar	bar	bar	N01U	-1...+1	B16U	16	N01U	-1...+1 *	N1V6	-1...+1,6	B02D	20	N02U	-1...+2 *	N02U	-1...+2	B25U	25	N03U	-1...+3 *	N2V5	-1...+2,5	B04D	40	N05U	-1...+5	N04U	-1...+4	B06D	60	N01D	-1...+10	N06U	-1...+6	B01C	100	B03U	0.3	N01D	-1...+10	B16D	160	B04U	0.4	B02U	2	B02C	200	B05U	0.5	B2V5	2,5	B25D	250	B06U	0.6	B04U	4	B04C	400	B07U	0.7	B06U	6	B06C	600	B01D	0.10	B01D	10	B01M	1000	B16U	0.16					B02D	0.20					B25U	0.25	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>N01U</td><td>-1...+1 *</td><td>B03D</td><td>0.30</td><td>N01U</td><td>-1...+1 *</td></tr> <tr><td>N02U</td><td>-1...+2 *</td><td>B04D</td><td>0.40</td><td>N02U</td><td>-1...+2 *</td></tr> <tr><td>N03U</td><td>-1...+3 *</td><td>B05D</td><td>0.50</td><td>N03U</td><td>-1...+3 *</td></tr> <tr><td>N05U</td><td>-1...+5</td><td>B06D</td><td>0.60</td><td>N05U</td><td>-1...+5</td></tr> <tr><td>N01D</td><td>-1...+10</td><td>B01C</td><td>0.100</td><td>N01D</td><td>-1...+10</td></tr> <tr><td>B03U</td><td>0.3</td><td>B16D</td><td>0.160</td><td>B03U</td><td>0.3</td></tr> <tr><td>B04U</td><td>0.4</td><td>B02C</td><td>0.200</td><td>B04U</td><td>0.4</td></tr> <tr><td>B05U</td><td>0.5</td><td>B25D</td><td>0.250</td><td>B05U</td><td>0.5</td></tr> <tr><td>B06U</td><td>0.6</td><td>B35D</td><td>0.350</td><td>B06U</td><td>0.6</td></tr> <tr><td>B07U</td><td>0.7</td><td>B04C</td><td>0.400</td><td>B07U</td><td>0.7</td></tr> <tr><td>B01D</td><td>0.10</td><td>B05C</td><td>0.500</td><td>B01D</td><td>0.10</td></tr> <tr><td>B16U</td><td>0.16</td><td>B06C</td><td>600</td><td>B16U</td><td>0.16</td></tr> <tr><td>B02D</td><td>0.20</td><td>B07C</td><td>700</td><td>B16U</td><td>0.16</td></tr> <tr><td>B25U</td><td>0.25</td><td>B01M</td><td>1000</td><td>B02D</td><td>0.20</td></tr> </tbody> </table>	bar	bar	bar	bar	bar	bar	N01U	-1...+1 *	B03D	0.30	N01U	-1...+1 *	N02U	-1...+2 *	B04D	0.40	N02U	-1...+2 *	N03U	-1...+3 *	B05D	0.50	N03U	-1...+3 *	N05U	-1...+5	B06D	0.60	N05U	-1...+5	N01D	-1...+10	B01C	0.100	N01D	-1...+10	B03U	0.3	B16D	0.160	B03U	0.3	B04U	0.4	B02C	0.200	B04U	0.4	B05U	0.5	B25D	0.250	B05U	0.5	B06U	0.6	B35D	0.350	B06U	0.6	B07U	0.7	B04C	0.400	B07U	0.7	B01D	0.10	B05C	0.500	B01D	0.10	B16U	0.16	B06C	600	B16U	0.16	B02D	0.20	B07C	700	B16U	0.16	B25U	0.25	B01M	1000	B02D	0.20	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>N01U</td><td>-1...+1 *</td><td>B25U</td><td>0.25</td><td>N01U</td><td>-1...+1 *</td></tr> <tr><td>N02U</td><td>-1...+2 *</td><td>B03D</td><td>0.30</td><td>N02U</td><td>-1...+2 *</td></tr> <tr><td>N03U</td><td>-1...+3 *</td><td>B04D</td><td>0.40</td><td>N03U</td><td>-1...+3 *</td></tr> <tr><td>N05U</td><td>-1...+5</td><td>B05D</td><td>0.50</td><td>N05U</td><td>-1...+5</td></tr> <tr><td>N01D</td><td>-1...+10</td><td>B06D</td><td>0.60</td><td>N01D</td><td>-1...+10</td></tr> <tr><td>B03U</td><td>0.3</td><td>B01C</td><td>0.100</td><td>B03U</td><td>0.3</td></tr> <tr><td>B04U</td><td>0.4</td><td>B16D</td><td>0.160</td><td>B04U</td><td>0.4</td></tr> <tr><td>B05U</td><td>0.5</td><td>B02C</td><td>0.200</td><td>B05U</td><td>0.5</td></tr> <tr><td>B06U</td><td>0.6</td><td>B25D</td><td>0.250</td><td>B06U</td><td>0.6</td></tr> <tr><td>B07U</td><td>0.7</td><td>B35D</td><td>0.350</td><td>B07U</td><td>0.7</td></tr> <tr><td>B01D</td><td>0.10</td><td>B04C</td><td>0.400</td><td>B01D</td><td>0.10</td></tr> <tr><td>B16U</td><td>0.16</td><td>B05C</td><td>0.500</td><td>B16U</td><td>0.16</td></tr> <tr><td>B02D</td><td>0.20</td><td>B06C</td><td>600</td><td>B16U</td><td>0.16</td></tr> <tr><td>B25U</td><td>0.25</td><td>B07C</td><td>700</td><td>B16U</td><td>0.16</td></tr> <tr><td></td><td></td><td>B01M</td><td>1000</td><td>B02D</td><td>0.20</td></tr> </tbody> </table>	bar	bar	bar	bar	bar	bar	N01U	-1...+1 *	B25U	0.25	N01U	-1...+1 *	N02U	-1...+2 *	B03D	0.30	N02U	-1...+2 *	N03U	-1...+3 *	B04D	0.40	N03U	-1...+3 *	N05U	-1...+5	B05D	0.50	N05U	-1...+5	N01D	-1...+10	B06D	0.60	N01D	-1...+10	B03U	0.3	B01C	0.100	B03U	0.3	B04U	0.4	B16D	0.160	B04U	0.4	B05U	0.5	B02C	0.200	B05U	0.5	B06U	0.6	B25D	0.250	B06U	0.6	B07U	0.7	B35D	0.350	B07U	0.7	B01D	0.10	B04C	0.400	B01D	0.10	B16U	0.16	B05C	0.500	B16U	0.16	B02D	0.20	B06C	600	B16U	0.16	B25U	0.25	B07C	700	B16U	0.16			B01M	1000	B02D	0.20
bar	bar	bar	bar	bar	bar																																																																																																																																																																																																																																																																																		
N01U	-1...+1	B16U	16	N01U	-1...+1 *																																																																																																																																																																																																																																																																																		
N1V6	-1...+1,6	B02D	20	N02U	-1...+2 *																																																																																																																																																																																																																																																																																		
N02U	-1...+2	B25U	25	N03U	-1...+3 *																																																																																																																																																																																																																																																																																		
N2V5	-1...+2,5	B04D	40	N05U	-1...+5																																																																																																																																																																																																																																																																																		
N04U	-1...+4	B06D	60	N01D	-1...+10																																																																																																																																																																																																																																																																																		
N06U	-1...+6	B01C	100	B03U	0.3																																																																																																																																																																																																																																																																																		
N01D	-1...+10	B16D	160	B04U	0.4																																																																																																																																																																																																																																																																																		
B02U	2	B02C	200	B05U	0.5																																																																																																																																																																																																																																																																																		
B2V5	2,5	B25D	250	B06U	0.6																																																																																																																																																																																																																																																																																		
B04U	4	B04C	400	B07U	0.7																																																																																																																																																																																																																																																																																		
B06U	6	B06C	600	B01D	0.10																																																																																																																																																																																																																																																																																		
B01D	10	B01M	1000	B16U	0.16																																																																																																																																																																																																																																																																																		
				B02D	0.20																																																																																																																																																																																																																																																																																		
				B25U	0.25																																																																																																																																																																																																																																																																																		
bar	bar	bar	bar	bar	bar																																																																																																																																																																																																																																																																																		
N01U	-1...+1 *	B03D	0.30	N01U	-1...+1 *																																																																																																																																																																																																																																																																																		
N02U	-1...+2 *	B04D	0.40	N02U	-1...+2 *																																																																																																																																																																																																																																																																																		
N03U	-1...+3 *	B05D	0.50	N03U	-1...+3 *																																																																																																																																																																																																																																																																																		
N05U	-1...+5	B06D	0.60	N05U	-1...+5																																																																																																																																																																																																																																																																																		
N01D	-1...+10	B01C	0.100	N01D	-1...+10																																																																																																																																																																																																																																																																																		
B03U	0.3	B16D	0.160	B03U	0.3																																																																																																																																																																																																																																																																																		
B04U	0.4	B02C	0.200	B04U	0.4																																																																																																																																																																																																																																																																																		
B05U	0.5	B25D	0.250	B05U	0.5																																																																																																																																																																																																																																																																																		
B06U	0.6	B35D	0.350	B06U	0.6																																																																																																																																																																																																																																																																																		
B07U	0.7	B04C	0.400	B07U	0.7																																																																																																																																																																																																																																																																																		
B01D	0.10	B05C	0.500	B01D	0.10																																																																																																																																																																																																																																																																																		
B16U	0.16	B06C	600	B16U	0.16																																																																																																																																																																																																																																																																																		
B02D	0.20	B07C	700	B16U	0.16																																																																																																																																																																																																																																																																																		
B25U	0.25	B01M	1000	B02D	0.20																																																																																																																																																																																																																																																																																		
bar	bar	bar	bar	bar	bar																																																																																																																																																																																																																																																																																		
N01U	-1...+1 *	B25U	0.25	N01U	-1...+1 *																																																																																																																																																																																																																																																																																		
N02U	-1...+2 *	B03D	0.30	N02U	-1...+2 *																																																																																																																																																																																																																																																																																		
N03U	-1...+3 *	B04D	0.40	N03U	-1...+3 *																																																																																																																																																																																																																																																																																		
N05U	-1...+5	B05D	0.50	N05U	-1...+5																																																																																																																																																																																																																																																																																		
N01D	-1...+10	B06D	0.60	N01D	-1...+10																																																																																																																																																																																																																																																																																		
B03U	0.3	B01C	0.100	B03U	0.3																																																																																																																																																																																																																																																																																		
B04U	0.4	B16D	0.160	B04U	0.4																																																																																																																																																																																																																																																																																		
B05U	0.5	B02C	0.200	B05U	0.5																																																																																																																																																																																																																																																																																		
B06U	0.6	B25D	0.250	B06U	0.6																																																																																																																																																																																																																																																																																		
B07U	0.7	B35D	0.350	B07U	0.7																																																																																																																																																																																																																																																																																		
B01D	0.10	B04C	0.400	B01D	0.10																																																																																																																																																																																																																																																																																		
B16U	0.16	B05C	0.500	B16U	0.16																																																																																																																																																																																																																																																																																		
B02D	0.20	B06C	600	B16U	0.16																																																																																																																																																																																																																																																																																		
B25U	0.25	B07C	700	B16U	0.16																																																																																																																																																																																																																																																																																		
		B01M	1000	B02D	0.20																																																																																																																																																																																																																																																																																		
PROTECTION CLASS (IEC 529) (WITH FEMALE CONNECTOR MOUNTED)	IP65/IP67	IP65/IP66/IP67	IP65/IP67																																																																																																																																																																																																																																																																																				
PROCESS CONNECTIONS	G1/4 gas male (DIN 3852-E) (E) 1/4-18 NPT male (7)	G 1/4 gas male (DIN 3852-E) (E) G 1/2 gas male (DIN 3852-E) (3) 1/4"-18 NPT male (7) 1/2"-14 NPT male (J)	G 1/4 gas male (DIN 3852-E) (E) 1/4-18 NPT male (7) 1/2"-14 NPT male (J) G 1/2 gas male (DIN 3852-E) (3)																																																																																																																																																																																																																																																																																				
MAIN APPLICATIONS	- Compressors - Distributors - Methane gas	- Hydraulic power units - Test benches - Plastic injection presses - Die-casting injection presses on request	- Hydraulic power units - Test benches - Plastic injection presses - Die-casting injection presses																																																																																																																																																																																																																																																																																				



PRESSURE TRANSDUCERS

MAIN TECHNICAL CHARACTERISTICS



MODEL	TSA		TPS		TPSA																																																																																																	
MEASUREMENT RANGES	0...0.05 a 0...60bar (0...1 a 0...1000psi) Absolute ranges >= 1 bar / 15psi		0...10 bar a 0...1000 bar (0...150psi a 0...15000psi)		0...4 bar a 0...1000 bar (0...60psi a 0...15000psi)																																																																																																	
ACCURACY	± 0.15% FS (typical) (±0.5% FS for absolute ranges)		± 0.15% FS (typical) >200bar/3000psi ± 0.25% FS (typical) ≤200bar/3000psi		± 0.1% FS (typical) ≥ 100bar/1500psi ± 0.15% FS (typical) <100bar/1500psi																																																																																																	
OVERPRESSURE	4x...2x		2x		3x...2x																																																																																																	
BURST STRENGTH	6x...3x		4x...2.5x		5x...2.5x																																																																																																	
RESPONSE TIME	< 4 msec		<0,1 msec.		< 1 msec.																																																																																																	
MEASURING PRINCIPLE PROPERTIES	Silicon piezoresistive		Extensimeter		Thick film of sensitive element deposited on steel membrane																																																																																																	
OPERATING TEMPERATURE (PROCESS) RANGE	-20...+85°C (-4...+185°F)		-40...+120°C (-40...+248°F)		-40...+105°C (-40...+221°F)																																																																																																	
COMPENSATED TEMPERATURE RANGE	-10...+85°C (+14...+185°F)		-20...+85°C (-4...+185°F)		-10...+85°C (14...+185°F)																																																																																																	
ZERO DRIFT IN COMPENSATED FIELD	± 0.01% FS/°C (typical) (± 0.02% FS/°C max) ranges >1 bar ± 0.04%FS/°C (typical) ranges ≤ 1 bar		± 0.01% FS/°C (typical) (± 0.02% FS/°C max.)		± 0.008% FS/°C (typical) (± 0.015% FS/°C max.)																																																																																																	
TRANSDUCER BODY CONSTRUCTION MATERIAL	AISI 304 stainless steel		AISI 304 stainless steel		AISI 304 stainless steel																																																																																																	
PARTS IN CONTACT WITH THE PROCESS	AISI 316L stainless steel		17-4PH stainless steel		17-4PH stainless steel																																																																																																	
ELECTRICAL CONNECTIONS	4-pin M12x1 connector (Z) EN 175301-801 type A connector (E) EN 175301-801 type C connector (M) 2/3 pole shielded cable (F)		7-pin connector (P) 6-pin connector (V) 6-pin x0.25 shielded cable (1m) (F) 4-pin M12x1 connector (Z) 4-pin solenoid valve connector (E) 4-pin micro-solenoid valve connector (M)		4-pin solenoid valve connector (E) 2/4-pin x0.25 shielded cable (2m) (F) 4-pin M12x1 connector (Z) 4-pin micro solenoid valve connector (M) 7-pin connector (P) 6-pin connector (V)																																																																																																	
OUTPUT SIGNAL	Analogue 4...20 mA 0...10 Vdc 0.1...10.1 Vdc 0...5 Vdc		Ratiometric mV/V		Analogue Standard 0.1...10.1 Vdc - 4...20 mA 0...10 Vdc On request 0.1...5.1 Vdc - 0...5 Vdc 1...5 Vdc - 1...10 Vdc 1...6 Vdc																																																																																																	
MEASUREMENT RANGES	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>BV05*</td><td>0...0.05</td></tr> <tr><td>BV10*</td><td>0...0.1</td></tr> <tr><td>BV25*</td><td>0...0.25</td></tr> <tr><td>BV50*</td><td>0...0.5</td></tr> <tr><td>B01U</td><td>0...1</td></tr> <tr><td>B1V2</td><td>0.8...1.2</td></tr> <tr><td>B02U</td><td>0...2</td></tr> <tr><td>B2V5</td><td>0...2.5</td></tr> <tr><td>B04U</td><td>0...4</td></tr> <tr><td>B05U</td><td>0...5</td></tr> </tbody> </table>		bar	bar	BV05*	0...0.05	BV10*	0...0.1	BV25*	0...0.25	BV50*	0...0.5	B01U	0...1	B1V2	0.8...1.2	B02U	0...2	B2V5	0...2.5	B04U	0...4	B05U	0...5	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B01D</td><td>0...10</td></tr> <tr><td>B16U</td><td>0...16</td></tr> <tr><td>B02D</td><td>0...20</td></tr> <tr><td>B25U</td><td>0...25</td></tr> <tr><td>B03D</td><td>0...30</td></tr> <tr><td>B35U</td><td>0...35</td></tr> <tr><td>B04D</td><td>0...40</td></tr> <tr><td>B05D</td><td>0...50</td></tr> <tr><td>B06D</td><td>0...60</td></tr> </tbody> </table>		bar	bar	B01D	0...10	B16U	0...16	B02D	0...20	B25U	0...25	B03D	0...30	B35U	0...35	B04D	0...40	B05D	0...50	B06D	0...60	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B01C</td><td>0...100</td></tr> <tr><td>B16D</td><td>0...160</td></tr> <tr><td>B02C</td><td>0...200</td></tr> <tr><td>B25D</td><td>0...250</td></tr> <tr><td>B35D</td><td>0...350</td></tr> <tr><td>B04C</td><td>0...400</td></tr> <tr><td>B05C</td><td>0...500</td></tr> <tr><td>B06C</td><td>0...600</td></tr> <tr><td>B07C</td><td>0...700</td></tr> <tr><td>B01M</td><td>0...1000</td></tr> </tbody> </table>		bar	bar	B01C	0...100	B16D	0...160	B02C	0...200	B25D	0...250	B35D	0...350	B04C	0...400	B05C	0...500	B06C	0...600	B07C	0...700	B01M	0...1000	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B04U</td><td>0...4</td></tr> <tr><td>B05U</td><td>0...5</td></tr> <tr><td>B06U</td><td>0...6</td></tr> <tr><td>B07U</td><td>0...7</td></tr> <tr><td>B01D</td><td>0...10</td></tr> <tr><td>B16U</td><td>0...16</td></tr> <tr><td>B02D</td><td>0...20</td></tr> <tr><td>B25U</td><td>0...25</td></tr> <tr><td>B03D</td><td>0...30</td></tr> <tr><td>B04C</td><td>0...400</td></tr> <tr><td>B05C</td><td>0...500</td></tr> <tr><td>B06C</td><td>0...600</td></tr> <tr><td>B07C</td><td>0...700</td></tr> <tr><td>B01M</td><td>0...1000</td></tr> </tbody> </table>		bar	bar	B04U	0...4	B05U	0...5	B06U	0...6	B07U	0...7	B01D	0...10	B16U	0...16	B02D	0...20	B25U	0...25	B03D	0...30	B04C	0...400	B05C	0...500	B06C	0...600	B07C	0...700	B01M	0...1000
bar	bar																																																																																																					
BV05*	0...0.05																																																																																																					
BV10*	0...0.1																																																																																																					
BV25*	0...0.25																																																																																																					
BV50*	0...0.5																																																																																																					
B01U	0...1																																																																																																					
B1V2	0.8...1.2																																																																																																					
B02U	0...2																																																																																																					
B2V5	0...2.5																																																																																																					
B04U	0...4																																																																																																					
B05U	0...5																																																																																																					
bar	bar																																																																																																					
B01D	0...10																																																																																																					
B16U	0...16																																																																																																					
B02D	0...20																																																																																																					
B25U	0...25																																																																																																					
B03D	0...30																																																																																																					
B35U	0...35																																																																																																					
B04D	0...40																																																																																																					
B05D	0...50																																																																																																					
B06D	0...60																																																																																																					
bar	bar																																																																																																					
B01C	0...100																																																																																																					
B16D	0...160																																																																																																					
B02C	0...200																																																																																																					
B25D	0...250																																																																																																					
B35D	0...350																																																																																																					
B04C	0...400																																																																																																					
B05C	0...500																																																																																																					
B06C	0...600																																																																																																					
B07C	0...700																																																																																																					
B01M	0...1000																																																																																																					
bar	bar																																																																																																					
B04U	0...4																																																																																																					
B05U	0...5																																																																																																					
B06U	0...6																																																																																																					
B07U	0...7																																																																																																					
B01D	0...10																																																																																																					
B16U	0...16																																																																																																					
B02D	0...20																																																																																																					
B25U	0...25																																																																																																					
B03D	0...30																																																																																																					
B04C	0...400																																																																																																					
B05C	0...500																																																																																																					
B06C	0...600																																																																																																					
B07C	0...700																																																																																																					
B01M	0...1000																																																																																																					
PROTECTION CLASS (IEC 529) (WITH FEMALE CONNECTOR MOUNTED)	IP65/IP67		IP65/IP66/IP67		IP65/IP66/IP67																																																																																																	
PROCESS CONNECTIONS	G 1/4 gas male (DIN 3852-E) (E) G 1/2A (DIN 16288) (3)		Standard G 1/4 gas male (1) On request 7/16-20 UNF-2A male (SAE 4 for AS4395-E) (2) G 1/2A (DIN 16288) (3) G 1/4 gas female (4)		Standard G 1/4 gas male (1) On request 7/16-20 UNF-2A maschio (SAE 4 per AS4395-E) (2) G 1/2A (DIN 16288) (3) G 1/4 gas female (4)																																																																																																	
MAIN APPLICATIONS	- Food industri - Packaging - Air filters		- Test benches - Material testing machines		- Test benches																																																																																																	



MODEL	TPSADA		TPH		TPHADA																																																											
MEASUREMENT RANGES	0...4 bar a 0...1000 bar (0...60psi a 0...15000psi)		0...1000 a 0...5000 bar (0...15000 a 0...75000 psi)		0...1000 a 0...5000 bar (0...15000 a 0...75000 psi)																																																											
ACCURACY	± 0.1% FS (typical) ± 0.15% FS (typical)		± 0.1% FS (typical) ± 0.15% FS (typical)		± 0.1% FS (typical)																																																											
OVERPRESSURE	3x...2x		2 x Fondo Scala (max 6000 bar)		2 x Fondo Scala (max 6000 bar)																																																											
BURST STRENGTH	5x...2.5x		3 x Fondo Scala (max 7500 bar)		3 x Fondo Scala (max 7500 bar)																																																											
RESPONSE TIME	< 1 msec.		<0,1 msec.		< 1 msec.																																																											
MEASURING PRINCIPLE PROPERTIES	Thick film of sensitive element deposited on steel membrane		Strain gauge extensometer on steel		Strain gauge extensometer on steel																																																											
OPERATING TEMPERATURE (PROCESS) RANGE	-40...+105°C (-40...+221°F)		-30...+120°C (-22...+248°F)		-30...+120°C (-22...+248°F)																																																											
COMPENSATED TEMPERATURE RANGE	-10...+85°C (14...+185°F)		-10...+85°C (14...+185°F)		-10...+85°C (14...+185°F)																																																											
ZERO DRIFT IN COMPENSATED FIELD	± 0.008% FSO/°C typical (± 0.015% FSO/°C max.)		± 0.008% FSO/°C typical (± 0.015% FSO/°C max.)		± 0.01% FSO/°C typical (± 0.020% FSO/°C max.)																																																											
TRANSDUCER BODY CONSTRUCTION MATERIAL	AISI 304 stainless steel		AISI 304 stainless steel		AISI 304 stainless steel																																																											
PARTS IN CONTACT WITH THE PROCESS	17-4PH stainless steel		15-5PH stainless steel / 17-4PH stainless steel		15-5PH stainless steel / 17-4PH stainless steel																																																											
ELECTRICAL CONNECTIONS	4-pin solenoid valve connector (E) 2/4-pin x0.25 shielded cable (2m) (F) 4-pin M12x1 connector (Z) 4-pin micro solenoid valve connector (M) 7-pin connector (P) 6-pin connector (V)		6-pin connector (V) 7-pin connector (P) 4-pin M12x1 connector (Z) 4/6-pin x0.25 shielded cable (1m) (F) 4-pin Type A DIN connector (E) MicroDin 4-pin Type C-ind D 9.4 mm connector (M)		6-pin connector (V) 7-pin connector (P) 4-pin M12x1 connector (Z) 4/6-pin x0.25 shielded cable (1m) (F) 4-pin Type A DIN connector (E) MicroDin 4-pin Type C-ind D 9.4 mm connector (M)																																																											
OUTPUT SIGNAL	Analogue Standard 0.1...10.1 Vdc - 4...20 mA 0...10 Vdc On request 0.1...5.1 Vdc - 0...5 Vdc 1...5 Vdc - 1...10 Vdc 1...6 Vdc		Ratiometric mV/V		Analogue Standard 4.20 mA - 0.10 Vdc On request 0.1...5.1 Vdc - 0...5 Vdc 1.5 Vdc - 1.10 Vdc 0.1...10.1 Vdc																																																											
MEASUREMENT RANGES	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B04U</td><td>0...4</td></tr> <tr><td>B05U</td><td>0...5</td></tr> <tr><td>B06U</td><td>0...6</td></tr> <tr><td>B07U</td><td>0...7</td></tr> <tr><td>B01D</td><td>0...10</td></tr> <tr><td>B16U</td><td>0...16</td></tr> <tr><td>B02D</td><td>0...20</td></tr> <tr><td>B25U</td><td>0...25</td></tr> <tr><td>B03D</td><td>0...30</td></tr> <tr><td>B04C</td><td>0...400</td></tr> <tr><td>B05C</td><td>0...500</td></tr> <tr><td>B06C</td><td>0...600</td></tr> <tr><td>B07C</td><td>0...700</td></tr> <tr><td>B01M</td><td>0...1000</td></tr> </tbody> </table>		bar	bar	B04U	0...4	B05U	0...5	B06U	0...6	B07U	0...7	B01D	0...10	B16U	0...16	B02D	0...20	B25U	0...25	B03D	0...30	B04C	0...400	B05C	0...500	B06C	0...600	B07C	0...700	B01M	0...1000	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B01M</td><td>0...1000</td></tr> <tr><td>B15C</td><td>0...1500</td></tr> <tr><td>B02M</td><td>0...2000</td></tr> <tr><td>B35C</td><td>0...3500</td></tr> <tr><td>B04M</td><td>0...4000</td></tr> <tr><td>B05M</td><td>0...5000</td></tr> </tbody> </table>		bar	bar	B01M	0...1000	B15C	0...1500	B02M	0...2000	B35C	0...3500	B04M	0...4000	B05M	0...5000	<table border="1"> <thead> <tr> <th>bar</th> <th>bar</th> </tr> </thead> <tbody> <tr><td>B01M</td><td>0...1000</td></tr> <tr><td>B15C</td><td>0...1500</td></tr> <tr><td>B02M</td><td>0...2000</td></tr> <tr><td>B35C</td><td>0...3500</td></tr> <tr><td>B04M</td><td>0...4000</td></tr> <tr><td>B05M</td><td>0...5000</td></tr> </tbody> </table>		bar	bar	B01M	0...1000	B15C	0...1500	B02M	0...2000	B35C	0...3500	B04M	0...4000	B05M	0...5000
bar	bar																																																															
B04U	0...4																																																															
B05U	0...5																																																															
B06U	0...6																																																															
B07U	0...7																																																															
B01D	0...10																																																															
B16U	0...16																																																															
B02D	0...20																																																															
B25U	0...25																																																															
B03D	0...30																																																															
B04C	0...400																																																															
B05C	0...500																																																															
B06C	0...600																																																															
B07C	0...700																																																															
B01M	0...1000																																																															
bar	bar																																																															
B01M	0...1000																																																															
B15C	0...1500																																																															
B02M	0...2000																																																															
B35C	0...3500																																																															
B04M	0...4000																																																															
B05M	0...5000																																																															
bar	bar																																																															
B01M	0...1000																																																															
B15C	0...1500																																																															
B02M	0...2000																																																															
B35C	0...3500																																																															
B04M	0...4000																																																															
B05M	0...5000																																																															
PROTECTION CLASS (IEC 529) (WITH FEMALE CONNECTOR MOUNTED)	IP65/IP66/IP67		IP65/IP66/IP67		IP65/IP66/IP67																																																											
PROCESS CONNECTIONS	Standard G 1/4 gas male (1) On request 7/16-20 UNF-2A male (SAE 4 for AS4395-E) (2) G 1/2A (DIN 16288) (3) G 1/4 gas female (4)		F-250-C (9/16-18UNF female) (D) M16 x 1.5 female (E)		F-250-C (9/16-18UNF female) (D) M16 x 1.5 female (E)																																																											
MAIN APPLICATIONS	- Production test benches		- Waterjet - High pressure pumps - High pressure test benches		- Waterjet - High pressure pumps - High pressure test benches																																																											

PRESSURE TRANSDUCERS

MAIN TECHNICAL CHARACTERISTICS



MODEL	TPF		TPFADA		TPFAS	
MEASUREMENT RANGES	0...10 a 0...1000bar (0...150 a 0...15000psi)		0...10 a 0...1000bar (0...150 a 0...15000psi)		0...25 a 0...600 bar (0...375 a 0...9000 psi)	
ACCURACY	H ± 0,2% FS (typical) M ± 0,5% FS (typical)		H ± 0,2% FS (typical) M ± 0,5% FS (typical)		±0.5% FS	
OVERPRESSURE	3 x Full scale (max 2000 bar)		3 x Full scale (max 2000 bar)		3 x Full scale	
BURST STRENGTH	4 x Full scale (max 2000 bar)		4 x Full scale (max 2000 bar)		4 x Full scale (max 2000 bar)	
RESPONSE TIME	<0,1 msec.		<1 msec.		<1 msec.	
MEASURING PRINCIPLE PROPERTIES	Strain gauge extensometer on steel		Strain gauge extensometer on steel		Strain gauge extensometer on steel	
OPERATING TEMPERATURE (PROCESS) RANGE	-40...+120°C (-40...+248°F)		-40...+120°C (-40...+248°F)		-40...+120°C (-40...+248°F)	
COMPENSATED TEMPERATURE RANGE	-20...+85°C (-4...+185°F)		-10...+85°C (-14...+185°F)		-10...+85°C (-14...+185°F)	
ZERO DRIFT IN COMPENSATED FIELD	± 0,01% FS/°C (typical) ± 0,02% FS/°C (typical)		± 0,01% FS/°C (typical)		± 0,01% FS/°C (typical)	
TRANSDUCER BODY CONSTRUCTION MATERIAL	AISI 304 stainless steel		AISI 304 stainless steel		AISI 305 stainless steel	
PARTS IN CONTACT WITH THE PROCESS	17-4PH stainless steel		17-4PH stainless steel		17-4PH stainless steel	
ELECTRICAL CONNECTIONS	6-pin connector (V) 7-pin connector (P) 4-pin M12x1 connector (Z) 6-pin x0.25 shielded cable (1m) (F) 4-pin solenoid valve connector (E) 4-pin micro-solenoid valve connector (M)		6-pin connector (V) 7-pin connector (P) 4-pin M12x1 connector (Z) 4/6-pin x0.25 shielded cable (1m) (F) 4-pin solenoid valve connector (E) 4-pin micro-solenoid valve connector (M)		6-pin connector (V) 7-pin connector (P) 4-pin M12x1 connector (Z) 4/6-pin x0.25 shielded cable (1m) (F) 4-pin solenoid valve connector (E) 4-pin micro-solenoid valve connector (M)	
OUTPUT SIGNAL	Ratiometric		Analogue		Analogue	
	mV/V		Standard 4...20 mA 0...10 Vdc 0...5.1 Vdc On request 0...5 Vdc - 1...5 Vdc 1...10 Vdc - 1...6 Vdc 0...10.1 Vdc		4...20 mA - 0...10 Vdc 0...5.1 Vdc - 0...5 Vdc 1...5 Vdc - 1...10 Vdc 1...6 Vdc - 0...10.1 Vdc	
MEASUREMENT RANGES	bar		bar		bar	
	B01D 0...10 B16U 0...16 B02D 0...20 B25U 0...25 B03D 0...30 B35U 0...35 B04D 0...40 B05D 0...50 B06D 0...60 B01C 0...100	B16D 0...160 B02C 0...200 B25D 0...250 B35D 0...350 B04C 0...400 B05C 0...500 B06C 0...600 B07C 0...700 B01M 0...1000	B01D 0...10 B02D 0...20 B25U 0...25 B03D 0...30 B35U 0...35 B04D 0...40 B05D 0...50 B06D 0...60 B01C 0...100	B01C 0...100 B16D 0...160 B02C 0...200 B25D 0...250 B35D 0...350 B04C 0...400 B05C 0...500 B06C 0...600 B07C 0...700 B01M 0...1000	B25U 0...25 B03D 0...30 B35U 0...35 B04D 0...40 B05D 0...50 B06D 0...60 B01C 0...100	B16D 0...160 B02C 0...200 B25D 0...250 B35D 0...350 B04C 0...400 B05C 0...500 B06C 0...600 B07C 0...700 B06C 0...600
PROTECTION CLASS (IEC 529) (WITH FEMALE CONNECTOR MOUNTED)	IP65/IP66/IP67		IP65/IP66/IP67		IP65/IP66/IP67	
PROCESS CONNECTIONS	Standard M18x1,5 (G) - 1/2" G male (M) On request 3/4-16 UNF (L)		Standard M18x1,5 (G) - 1/2" G male (M) On request 3/4-16 UNF (L)		G 1/4 B front seal (Y) G 1/4 E (E) M10x1 E (T)	
MAIN APPLICATIONS	- Mixing dosing pumps - Food industry		- Rubber processing - Mixing dosing pumps - Concrete pumps		- Mixing dosing pumps - Concrete pumps	



PROCESS CONNECTIONS

	KS	KX	KH	KHC	TK	TKDA *	TSA	TPS	TPSA	TPSADA *	TPH	TPHADA	TPF	TPFADA	TPFAS
G 1/4 GAS MALE (DIN 3852-E)	(E)	(E)	(E)	(E)	(E)*	(E)*	(E)	(E)*	(E)*	(E)*					(E)
G 1/4 GAS MALE (DIN 3852-A)					(1)	(1)	(1)	(1)	(1)	(1)					
7/16-20 UNF-2A MALE (SAE 4 PER AS4395-E)					(2)	(2)		(2)*	(2)*	(2)*					
G 1/2A (DIN 16288)	(3)	(3)			(3)	(3)	(3)	(3)*	(3)*	(3)*					
G 1/4 GAS FEMALE					(4)*	(4)*		(4)*	(4)*	(4)*					
1/8-27 NPT FEMALE					(5)*	(5)*		(5)*	(5)*	(5)*					
1/4 - 18 NPT FEMALE					(6)*	(6)*		(6)*	(6)*	(6)*					
1/4 - 18 NPT MALE		(7)	(7)	(7)	(7)*	(7)*		(7)*	(7)*	(7)*					
1/2 -14 NPT MALE		(J)													
M14 X 1,5 MALE					(8)*	(8)*		(8)(*)	(8)(*)	(8)(*)					
1/8 - 27 NPT MALE					(9)*	(9)*		(9)(*)	(9)(*)	(9)(*)					
M12 X 1,5 MALE					(R)	(R)		(R)*	(R)*	(R)*					
7/16-20 UNF-2A MALE (SAE 4 PER J1926-2)					(K)* **	(K)* **		(K)* **	(K)* **	(K)* **					
7/16-20 UNF-2A FEMALE (SAE 4)					(F)*	(F)*		(F)*	(F)*	(F)*					
F-250-C (9/16-18UNF FEMALE)											(D)	(D)			
M16 X 1.5 FEMALE											(E)	(E)			
G 1/4 B FRONT SEAL															(Y)
M18X1,5													(G)	(G)	
1/2" G MALE													(M)	(M)	
3/4-16 UNF													(L)*	(L)*	
M10X1 E															(T)

* Process connection on request
 ** Max. working pressure: 630 bar (9137 psi)

In the PROCESS CONNECTIONS table, the letter or number between () is the option that identifies the type of mechanical installation connection of the pressure probe to the process part.

CONNECTORS



CONNECTORS

			KS	KX	KH	KHC	TK	TKDA	TSA	TPS	TPSA	TPSADA	TPH	TPHADA	TPF	TPFADA	TPFAS
CON006	3 POLE + EARTH FEMALE CONNECTOR (EN 175301-803A); CULUS -40...+65°C	IP65		X			X	X	X	X	X	X	X	X	X	X	X
CON008	FEM. FEMALE 3 POLE + EARTH CONNECTOR (EN 175301-803C); P9.4	IP65		X			X	X		X	X	X	X	X	X	X	X
CON031	M12 5-POLE FEMALE CONNECTOR;	IP67				X											
CON041	M12 5-POLE FEMALE CONNECTOR, 90°	IP67				X											
CON045	FEM. CONN. 3-POLE + EARTH FEMALE CONN. (EN 175301-803A);H=28; CULUS -40...+65°C	IP65	X														X
CON047	FEMALE 3 POLE + EARTH CONNECTOR (EN 175301-803C); P8	IP65	X						X								
CON050	4-POLE 90° M12X1 FEMALE CONNECTOR	IP67	X							X			X	X	X	X	X
CON064	3-POLE + EARTH FEMALE CONNECTOR(EN 175301-803A); CULUS -40...+65°C (KH/KS SERIES)	IP65	X		X												
CON087	4-POLE M12X1 FEMALE CONNECTOR; CULUS -25...+90°C	IP67	X														X
CON088	4-POLE, 90°, M12X1 FEMALE CONNECTOR; CULUS -25...+90°C	IP67	X														X
CON110	7-POLE 90° M16 FEMALE CONNECTOR; CULUS -40...+100°C	IP40															X
CON111	7-POLE M16 FEMALE CONNECTOR; CULUS -40...+100°C	IP67															X
CON112	7-POLE M16 FEMALE CONNECTOR; CULUS -40...+100°C	IP40															X
CON113	3 POLE +EARTH FEMALE CONNECTOR (EN 175301-803A); CULUS -40...+90°C	IP65	X														X
CON114	3-POLE + EARTH FEMALE CONNECTOR (EN 175301-803A);H=28; CULUS -40...+90°C	IP65	X														X
CON115	3-POLE + EARTH FEMALE CONNECTOR (EN 175301-803C); P9.4 IP65, CULUS -40...+90°C	IP65	X														X
CON116	3-POLE + EARTH FEMALE CONNECTOR (EN 175301-EN 803C); P8, CULUS -40...+90°C	IP65	X														
CON293	4-POLE M12X1 FEMALE CONNECTOR	IP67	X	X	X		X	X	X	X	X	X	X	X	X	X	X
CON300	6-POLE FEMALE CONNECTOR, BAVONET	IP66		X			X	X		X	X	X	X	X	X	X	X
CON320	7-POLE M16 FEMALE CONNECTOR	IP40		X						X			X	X	X	X	X
CON321	7-POLE M16 FEMALE CONNECTOR	IP67		X			X	X		X	X	X	X	X	X	X	X
CON322	7-POLE 90° M16 FEMALE CONNECTOR	IP40								X			X	X	X	X	X
C02W	6-PIN FEMALE CONNECTOR (CON300) + 2M CABLE	IP65								X						X	
C02WLS	6-POLE FEMALE CONNECTOR (CON300) + 2M CABLE (6X0.25)	IP66											X	X		X	X
CAV011	FEMALE CONNECTOR WITH 2 METRES OF CABLE	IP67				X											
CAV220	M12X1 FEMALE CONNECTOR WITH 2 METRES OF CABLE, VENTED (CULUS -30+80°C)	IP67	X	X	X	X			X								X

ACCESSORIES

DISPLAY

The TDP-1001 plug-in display is a universal local display device suitable for use with all Gefran pressure transmitters with 4-20 mA output and an EN 175301-803 A solenoid valve type connector.

It requires no doesn't require power supply, plugs directly into the connector and provides a 4-digit digital local indication in a programmable engineering unit. It is also equipped with a PNP type open collector alarm threshold that can be set by the user for independent management of security systems, if present.

An intrinsically safe Atex certified version is also available for use in hazardous areas at risk of explosion, called TDP-2000.



ADAPTERS AND SEALS

A vast selection of native threaded connections is available for Gefran pressure transducers, from metric to gas, from NPT to UNF threads. A wide range of stainless steel adapters is also available, both male/male and male/female, with the corresponding seals, named PKITxxx, in order to meet all possible process connection requirements.



CONNECTORS AND EXTENSION CABLES

Gefran pressure transducers are available with various types of electrical connectors (EN175301803, M12x1, etc.), and each of these may be supplied with the corresponding female solder cable (named CONxxx) or an extension cable already assembled with the female connector (named CAVxxx), up to 30 metres in length.



MATCHING PRODUCTS

CONTROLLERS

- universal inputs for amplified and non-amplified probes - very high acquisition speed
- high accuracy
- mathematical calculations, pressure delta
- 4 configurable outputs
- Modbus and Profibus communication




PRESSURE GAUGES

- universal inputs for amplified probes
- very high acquisition speed
- high accuracy
- mathematical calculations, pressure delta - 4 configurable outputs
- Modbus and Profibus communication
- input from non-amplified pressure probes - 4 configurable outputs
- Modbus communication
- input from amplified pressure probes
- 4 configurable outputs
- Modbus communication



COD. 81221H

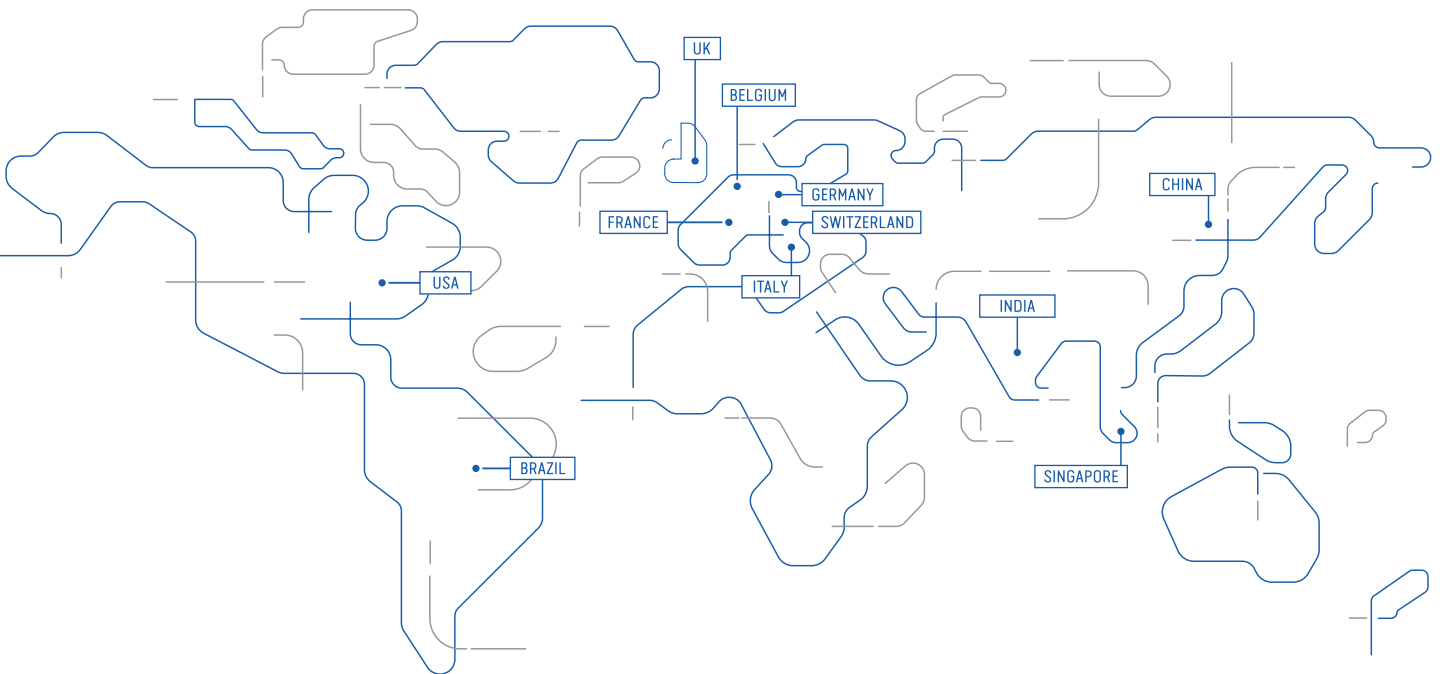

WWW.GEFRAN.COM

