

# TE2

Compact RTD temperature sensor

TE2-#.###.###.0

## Overview

- Compact and rugged design
- Customer-specific immersion depth down to 3000 mm
- Precision measurement from -50 ... 250 °C
- Integrated 4 ... 20 mA transmitter or Pt100 output
- Easy process implementation from DN 25 or in tank



## EN 50155

## Technical data

### Performance characteristics

Pt100 accuracy class (EN 60751)	B ( $\pm 0.3 \text{ °C}$ at $0 \text{ °C}$ ) $\pm (0.3 + 0.005 \times t) \text{ °C}$ A ( $\pm 0.15 \text{ °C}$ at $0 \text{ °C}$ ) $\pm (0.15 + 0.002 \times t) \text{ °C}$ 1/3 B ( $\pm 0.1 \text{ °C}$ at $0 \text{ °C}$ ) $\pm 1/3 \times (0.3 + 0.005 \times t) \text{ °C}$ 1/6 B ( $\pm 0.05 \text{ °C}$ at $0 \text{ °C}$ ) $\pm 1/6 \times (0.3 + 0.005 \times t) \text{ °C}$
---------------------------------	---

Thermal response time, T50	RTD element only $\leq 1.0 \text{ s}$ , conical sensor $\leq 1.3 \text{ s}$ , $\varnothing 3 \text{ mm}$ $\leq 2.5 \text{ s}$ , $\varnothing 4 \text{ mm}$ $\leq 3.0 \text{ s}$ , $\varnothing 6 \text{ mm}$
----------------------------	--

Thermal response time, T90	RTD element only $\leq 3.0 \text{ s}$ , $\varnothing 3 \text{ mm}$ $\leq 3.6 \text{ s}$ , $\varnothing 4 \text{ mm}$ $\leq 8.5 \text{ s}$ , $\varnothing 6 \text{ mm}$
----------------------------	---

Process pressure	Refer to section "Operating conditions"
------------------	---

Process temperature	Refer to section "Operating conditions"
---------------------	---

### Process connection

Connection variants	Refer to section "Dimensional drawings"
---------------------	---

Sensor length	$\leq 3000 \text{ mm}$
---------------	------------------------

Sensor diameter outside	$\varnothing 6 \text{ mm}$
-------------------------	----------------------------

Mounting position	Any, top, bottom, side
-------------------	------------------------

Standard response tip	$\varnothing 6 \text{ mm}$
-----------------------	----------------------------

Fast response tip	$\varnothing 3 \text{ mm}$ $\varnothing 4 \text{ mm}$
-------------------	--

Sensor tube material	AISI 316L (1.4404)
----------------------	--------------------

Surface roughness wetted parts	$R_a \leq 0.8 \text{ }\mu\text{m}$
--------------------------------	------------------------------------

### Ambient conditions

Operating temperature range	$-40 \dots 125 \text{ °C}$ , with Pt100 $-40 \dots 85 \text{ °C}$ , with transmitter
-----------------------------	---

### Ambient conditions

Storage temperature range	$-55 \dots 90 \text{ °C}$
Degree of protection (EN 60529)	$\text{IP 65}$ , with DIN EN 175301-803 A (DIN 43650 A), 4-pin $\text{IP 67}$ , with M12-A, 4-pin

Humidity	$\leq 100 \text{ \% RH}$ , condensing
----------	---------------------------------------

Long-term test (transmitter)	IEC 770 6.3.2
------------------------------	---------------

Vibration (sinusoidal) (EN 60068-2-6)	$1.6 \text{ mm p-p}$ ( $2 \dots 25 \text{ Hz}$ ), $4 \text{ g}$ ( $25 \dots 100 \text{ Hz}$ ), 1 octave / min.
---------------------------------------	--

### Output signal

Without transmitter	1 x Pt100, 4-wire
---------------------	-------------------

With transmitter	4 ... 20 mA, 2-wire
------------------	---------------------

### Housing

Style	Compact transmitter
-------	---------------------

Overall size	Refer to section "Dimensional drawings"
--------------	---

Material	AISI 304 (1.4301)
----------	-------------------

### Electrical connection

Connector	DIN EN 175301-803 A (DIN 43650 A), 4-pin M12-A, 4-pin
-----------	--

### Power supply

Voltage supply range	8 ... 35 V DC
----------------------	---------------

Power-up time	$< 20 \text{ s}$
---------------	------------------

Reverse polarity protection	Yes
-----------------------------	-----

### Factory settings

Output range	0 ... 150 °C
--------------	--------------

Damping	0 s
---------	-----

Output at sensor fault	23 mA
------------------------	-------

### Compliance and approvals

EMC	EN 61000-6-2 EN 61000-6-3 EN 61326-1 NE21
-----	--

# TE2

Compact RTD temperature sensor

TE2-#.###.####.####.0

## Technical data

### Compliance and approvals

Hygiene	FDA (21 CFR 177.2415) 3-A (74-07)
Railway applications	EN 50155

### Compliance and approvals

Explosion protection	Ex ia Simple apparatus, gas and dust
----------------------	--------------------------------------

## Transmitter

### Input

Measuring unit	°C °F
Min. measuring span	25 °C
Sample time	< 0.7 s
Accuracy	< 0.25 °C , @ ≤ 100 °C
Repeatability	< 0.1 °C
Resolution	14 bit
Ripple immunity	IEC 770 6.2.4.2
Error detection delay	< 10 s
Offset adjustment	± 10 °C , max.
Isolation, sensor to case	50 V AC , test 500V
Protection	± 35 V DC
Suppression	50 Hz 60 Hz

### Output

Output signal	4 ... 20 mA , 2-wire
Accuracy	< 0.1 % , measuring span < 0.016 mA
Temperature drift	< 0.003 %/K , typ. < 0.01 %/K , max.
Resolution	12 bit
Effect of variations in supply voltage	< 0.01 %/V
Ripple immunity	3 Vrms
Shunt resistance	$R_s \leq (V_{DC} - 8 V)/0.023 A$
Damping	0.0 ... 30.0 s , programmable
Up/Down scaling limits	23 mA / 3.5 mA

## Operating conditions

Ordering key	Process connection	BCID	Process pressure (bar)	Continuous	Process temperature
				Process temperature Standard @ Tamb ≤ 20 °C (° C)	Process temperature With cooling neck @ Tamb ≤ 20 °C (° C)
TE2-#.1.####.####.#	Sleeve Ø 6	T65	-1 ... 40	-50 ... 125	-50 ... 250
TE2-#.3.####.####.#	G 1/2 A ISO 228-1	G06	-1 ... 100	-50 ... 125	-50 ... 250
TE2-#.4.####.####.#	G 1/2 A hygienic	A03	-1 ... 40	-50 ... 125	-50 ... 250
TE2-#.5.####.####.#	M12 x 1.5 hygienic	A02	-1 ... 40	-50 ... 125	-50 ... 250
TE2-#.6.####.####.#	M12 x 1.5 hygienic, with PEEK cone	A02	-1 ... 10	-50 ... 115	N/A
TE2-#.7.####.####.#	G 1/8 female thread hygienic	A01	-1 ... 40	-50 ... 205	-50 ... 250
TE2-#.8.####.####.#	G 1/4 A DIN 3852-E	G50	-1 ... 100	-50 ... 125	-50 ... 250
TE2-#.9.####.####.#	ISO 2852 (Tri-Clamp), DN 33.7; 38, Ø 50.5	C04	-1 ... 40	-50 ... 125	-50 ... 250
TE2-#.A.####.####.#	Tri-Clamp Ø 24.9	C01	-1 ... 40	-50 ... 125	-50 ... 250
TE2-#.B.####.####.#	BHC 3A DN 38	B01	-1 ... 40	-50 ... 125	-50 ... 250
TE2-#.D.####.####.#	1/2-14 NPT	N02	-1 ... 100	-50 ... 125	-50 ... 250
TE2-#.E.####.####.#	1/4-18 NPT	N01	-1 ... 100	-50 ... 125	-50 ... 250
TE2-#.F.####.####.#	G 1/2 A DIN 3852-E	G51	-1 ... 100	-50 ... 125	-50 ... 250
TE2-#.G.####.####.#					

For further information on permissible process and ambient temperatures, please refer to the operating instructions.

# TE2

Compact RTD temperature sensor

TE2-#.###.#####.0


## Compliance and approvals

Ordering key	Process connection	BCID	EN 10/2011	EN 1935/2004 EN 2023/2006	FDA	3-A
TE2-#.1.#####.##	Sleeve Ø 6	T65				
TE2-#.3.#####.##	G 1/2 A ISO 228-1	G06				
TE2-#.4.#####.##	G 1/2 A hygienic	A03		■		
TE2-#.5.#####.##	M12 x 1.5 hygienic	A02		■		
TE2-#.6.#####.##	M12 x 1.5 hygienic, with PEEK cone	A02	■	■	■	
TE2-#.7.#####.##	G 1/8 female thread hygienic	A01		■		
TE2-#.8.#####.##	G 1/4 A DIN 3852-E	G50				
TE2-#.9.#####.##	ISO 2852 (Tri-Clamp), DN 33.7; 38, Ø 50.5	C04		■		■
TE2-#.A.#####.##	Tri-Clamp Ø 24.9	C01		■		
TE2-#.B.#####.##	BHC 3A DN 38	B01		■		■
TE2-#.D.#####.##	1/2-14 NPT	N02				
TE2-#.E.#####.##	1/4-18 NPT	N01				
TE2-#.F.#####.##						
TE2-#.G.#####.##	G 1/2 A DIN 3852-E	G51				


The requirements of the respective 3-A Sanitary Standard will be only fulfilled in combination with appropriate mounting accessories. Those are marked with the 3-A logo.

## Dimensional drawings (mm)


### Housing



Housing with connector M12-A, 4-pin



Housing with transmitter and connector M12-A, 4-pin



Housing with connector DIN EN 175301-803 A (DIN 43650 A), 4-pin


# TE2

Compact RTD temperature sensor

TE2-#.###.#.#.#.#.#.0

## Dimensional drawings (mm)


### Housing

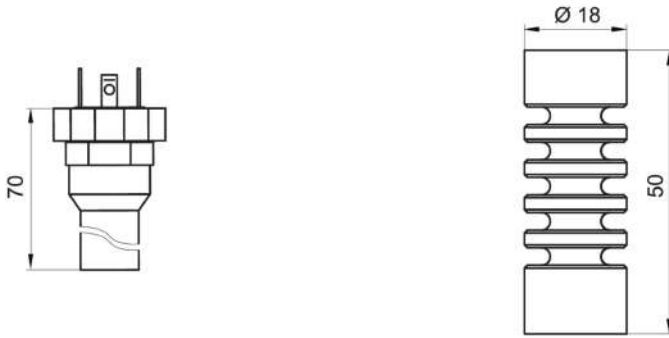


Housing with transmitter and connector DIN EN 175301-803 A (DIN 43650 A), 4-pin

Cooling neck


### Process connection




Without thread (BCID: T65)




G 1/2 A ISO 228-1 (BCID: G06)

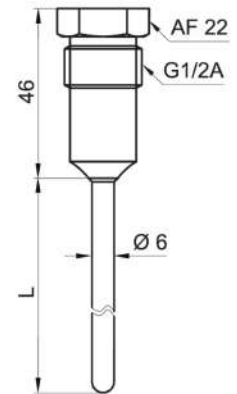


G 1/2 A hygienic (BCID: A03)



M12 × 1.5 hygienic (BCID: A02)



M12 × 1.5 hygienic, PEEK cone, tip Ø 3 x 5 mm (BCID: A02)



G 1/8 female thread hygienic (BCID: A01)


# TE2

Compact RTD temperature sensor


TE2-#. #.####.####.0

**Dimensional drawings (mm)**


**Process connection**




G 1/4 A DIN 3852-E (BCID: G50)




Tri-Clamp Ø 50.5 (BCID: C04)




Tri-Clamp Ø 24.9 (BCID: C01)

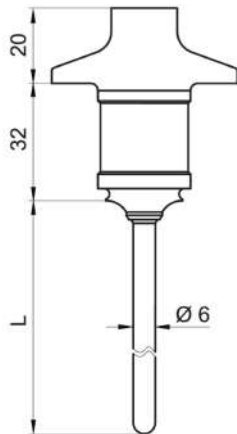


BHC 3A DN 38 (BCID: B01)



1/2-14 NPT (BCID: N02)




1/4-18 NPT (BCID: N01)



G 1/2 A DIN 3852-E (BCID: G51)



Standard response tip



Fast response tip

# TE2

Compact RTD temperature sensor

TE2-#.###.#.###.#.0

## Electrical connection

Output type	Electrical connection	Equivalent circuit	Function	Pin assignment									
<b>M12-A, 4-pin, stainless steel</b>													
Pt100 (Single element)			<table border="1"> <tr><td>Pt100 11</td><td>1, 2</td></tr> <tr><td>Pt100 12</td><td>3, 4</td></tr> <tr><td>Frame ground</td><td>Plug thread</td></tr> </table>	Pt100 11	1, 2	Pt100 12	3, 4	Frame ground	Plug thread				
Pt100 11		1, 2											
Pt100 12		3, 4											
Frame ground		Plug thread											
Pt100 (Double element)		<table border="1"> <tr><td>Pt100 11</td><td>1</td></tr> <tr><td>Pt100 12</td><td>4</td></tr> <tr><td>Pt100 21</td><td>2</td></tr> <tr><td>Pt100 22</td><td>3</td></tr> <tr><td>Frame ground</td><td>Plug thread</td></tr> </table>	Pt100 11	1	Pt100 12	4	Pt100 21	2	Pt100 22	3	Frame ground	Plug thread	
Pt100 11	1												
Pt100 12	4												
Pt100 21	2												
Pt100 22	3												
Frame ground	Plug thread												
4 ... 20 mA, 2-wire, Iout at pin 2		<table border="1"> <tr><td>+Vs</td><td>1</td></tr> <tr><td>Iout</td><td>2</td></tr> <tr><td>N.C.</td><td>3, 4</td></tr> <tr><td>Frame ground</td><td>Plug thread</td></tr> </table>	+Vs	1	Iout	2	N.C.	3, 4	Frame ground	Plug thread			
+Vs	1												
Iout	2												
N.C.	3, 4												
Frame ground	Plug thread												
4 ... 20 mA, 2-wire, Iout at pin 2, 3		<table border="1"> <tr><td>+Vs</td><td>1</td></tr> <tr><td>Iout</td><td>2, 3</td></tr> <tr><td>N.C.</td><td>4</td></tr> <tr><td>Frame ground</td><td>Plug thread</td></tr> </table>	+Vs	1	Iout	2, 3	N.C.	4	Frame ground	Plug thread			
+Vs	1												
Iout	2, 3												
N.C.	4												
Frame ground	Plug thread												
<b>DIN EN 175301-803 A (DIN 43650 A), 4-pin</b>													
Pt100 (Single element)			<table border="1"> <tr><td>N.C.</td><td>1</td></tr> <tr><td>Pt100 11</td><td>2</td></tr> <tr><td>Pt100 12</td><td>3</td></tr> <tr><td>Frame ground</td><td>Grounding lug</td></tr> </table>	N.C.	1	Pt100 11	2	Pt100 12	3	Frame ground	Grounding lug		
N.C.		1											
Pt100 11	2												
Pt100 12	3												
Frame ground	Grounding lug												
4 ... 20 mA, 2-wire		<table border="1"> <tr><td>+Vs</td><td>1</td></tr> <tr><td>Iout</td><td>2</td></tr> <tr><td>N.C.</td><td>3</td></tr> <tr><td>Frame ground</td><td>Grounding lug</td></tr> </table>	+Vs	1	Iout	2	N.C.	3	Frame ground	Grounding lug			
+Vs	1												
Iout	2												
N.C.	3												
Frame ground	Grounding lug												

## Ordering information

Ordering key - Configuration possibilities see website

Product	TE2	-	#	.	#	.	#	#	#	#	.	####	.	#
<b>Sensor tip</b>	TE2													
Not specified												0		
Standard response tip, Ø 6 mm												1		
Fast response tip, Ø 4 mm												2		
Fast response tip, Ø 3 mm												3		

# TE2

Compact RTD temperature sensor

TE2-#.###.###.0

## Ordering information

**Ordering key - Configuration possibilities see website**

	TE2	-	#	.	#	.	#	#	#	#	.	####	.	#
<b>Process Connection</b>														
Tube without connection														
G 1/2 A ISO 228-1 (G06)														1
G 1/2 A hygienic (A03)														3
M12 × 1.5 hygienic (A02)														4
M12 × 1.5 hygienic, PEEK cone, sensor tip Ø 3x5 mm (A02)														5
G1/8 ISO 228/1 female thread, Hygienic (A01)														6
G 1/4 A DIN 3852-E, with NBR seal (G50)														7
ISO 2852 (Tri-Clamp), DN 25; 33.7; 38, Ø 50.5 (C04)														8
DIN 32676-C (Tri-Clamp), DN 3/4, Ø 24.9 (C01)														9
BHC 3A DN 38 (B01)														A
1/2-14 NPT (N02)														B
1/4-18 NPT (N01)														D
G 1/2 A DIN 3852-E, with FKM seal (G51)														E
G 1/2 A DIN 3852-E, with EPDM seal (G51)														F
<b>Sensor element</b>														
1/1 B EN 60751, single														1
1/1 B EN 60751, duplex														2
1/3 B EN 60751, single														3
1/3 B EN 60751, duplex														4
1/6 B EN 60751, single														5
1/6 B EN 60751, duplex														6
1/1 A EN 60751, single														7
1/1 A EN 60751, duplex														8
<b>Cooling neck</b>														
Without cooling neck														0
With cooling neck														4
<b>Electrical connection</b>														
M12-A, 4-pin, stainless steel														1
M12-A, 4-pin, stainless steel, with integrated transmitter														2
DIN EN 175301-803 A (DIN 43650 A), 4-pin <sup>(1)</sup>														4
DIN EN 175301-803 A (DIN 43650 A), 4-pin, with integrated transmitter <sup>(1)</sup>														5
M12-A, 4-pin, stainless steel, with integrated transmitter, out pin 2+3														A
<b>Certificates</b>														
Not specified														0
Railway EN 50155														4
Ex ia Simple apparatus, gas and dust														9
<b>Sensor tube length (mm)</b>														
5 - 3000														####
<b>Configuration</b>														
No configuration														0
Configuring according to customer specification														C

(1) Including female power connector