

ITA-460

Water-resistant Fanless In-vehicle Computer with Intel® 8th/9th Gen Core™ i CPU



Features

- Intel® 8th/9th Gen Core™ i CPU (LGA1151)
- 8GB memory on board, 1 x SO-DIMM
- Supports 2 x Gigabit Ethernet, 2 x USB3.0/3.1
- Supports 2 x COM (RS232/422/485)
- Supports 1 x mSATA, 2 x 2.5" HDD/SSD
- Supports 3 x mini PCIe expansion sockets for integrating Wi-Fi, LTE, and GPS wireless communication modules through reserved 6 SMA connectors
- Supports 12/24V_{DC} vehicle power
- All-around IP65 rating for protection from water and dust ingress
- Wide operating temperature (-25 ~ 60 °C / -13 ~ 140 °F)
- No RED Certificate




Specifications


8th/9th Generation Processor (TDP 35W)	CPU	i7-9700TE	i5-9500TE	i3-9100TE	i7-8700T	i5-8500T			
	Core/Thread Number	8/8	6/6	4/4	6/12	6/6			
	Base Frequency	1.8GHz	2.2GHz	2.2GHz	2.4 GHz	2.1 GHz			
	Max Turbo Frequency	3.8GHz	3.6GHz	3.2GHz	4.0 GHz	3.5 GHz			
	L3 Cache	12MB	9MB	6MB	12MB	9MB			
	Chipset	H310							
	BIOS	AMI 256Mb SPI Flash							
8th/9th Generation Processor (TDP 65W)	CPU	i7-9700E	i5-9500E	i3-9100E	i7-8700	i5-8500	i3-8100	G5400	G4900
	Core/Thread Number	8/8	6/6	4/4	6/12	4/4	2/4	2/4	2/2
	Base Frequency	2.6GHz	3.0GHz	3.1GHz	3.2GHz	3.0GHz	3.6GHz	3.7GHz	2.9GHz
	Max Turbo Frequency	4.4GHz	4.2GHz	3.7GHz	4.6GHz	4.1GHz			
	L3 Cache	12MB	8MB	6MB	12MB	9MB	6MB	4MB	2MB
	Chipset	H310							
	BIOS	AMI 256Mb SPI Flash (limited to TDP 35W in default)							
Memory	Technology	Dual-channel DDR4 2666 MHz (without ECC)							
	Solder-down	8GB on board (optional 16GB on board)							
	Socket	1 x 260-pin DDR4 SO-DIMM (up to 16GB per socket)							
	Maximum Capacity	16GB (optional 32GB)							
Display	Chipset	H310: Intel® HD Graphics 610, supports DirectX 12							
	HDMI	1X HDMI (HDMI1.4b: up to 4096 x 2160@30Hz)							
Ethernet	Controller	Intel® i210IT							
	Interface	2 x Gigabit Ethernet with M12 X-Coded							
Storage	SATA	2 x maximum 9 mm 2.5" HDD/SSD							
	mSATA	1 x mSATA slot on board							
I/O	USB	2 x USB3.0/3.1							
	Serial Port	DB9 x 1 (2 x RS-232/422/485 support sw programmable)							
	Audio	M12 A-Coded x 1 (1 x line out and 1 x mic in)							
Expansion	Mini PCIe	H310: 3 x mini PCIe (PCIe Gen3 x 1, USB 2.0 with 1 SIM slot)							
LED	LED	4 (1 x power, 1 x storage, and 2 x LAN)							
Power	Type	AT/ATX							
	Input Voltage	8 ~ 32 V _{DC} (9.6 ~ 28.8V _{DC} full loading)							
	Power consumption	Typical: 33W, maximum: 95W							
Watchdog Timer	Output	System reset							
	Interval	Programmable 1 ~ 255 sec/min							
Environment	Operating Temperature	35W CPU w/ industrial SSD -25 ~ 60 °C / -13 ~ 140 °F with 0.7 m/s air flow							
	Storage Temperature	-40 ~ 85 °C							
	Humidity	95% @ 40 °C (non-condensing)							
	Vibration	MIL-STD-810G							
	Shock	MIL-STD-810G (75G 11 ms)							
Mechanical	Dimensions (W x H x D)	190 x 70 x 220 mm (7.48" x 2.76" x 8.66")							
	Weight	4kg							
	Installation	Desktop/wall mount							
	IP	IP65 protection from water and dust ingress							
Certifications	EMC	CE/FCC Class B, BSMI							
	Safety	CB/UL 62368, CCC, Emark, ISO 7637-2, BSMI							
OS Support		Windows 10, Linux Ubuntu 20.04							

Dimensions

Unit: mm

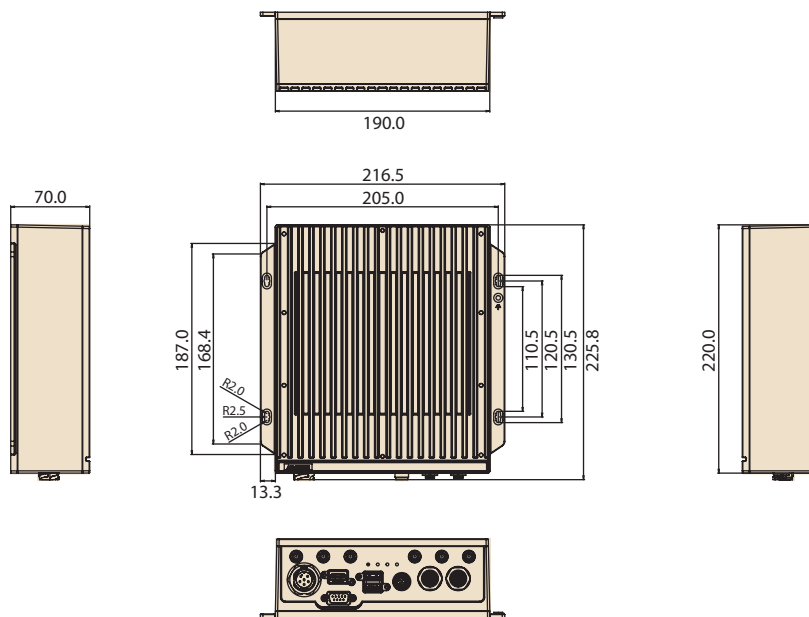

Front View

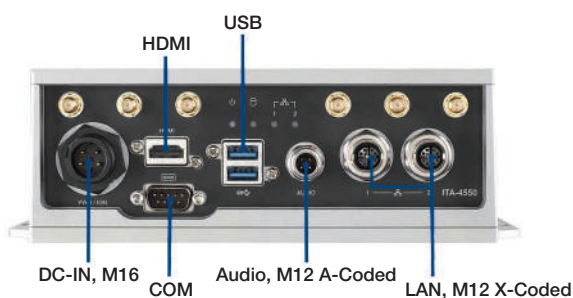

Ordering Information

Part Number	Description	HDMI	2.5" SSD slot	mSATA slot	USB3.0/3.1	LAN	COM	miniPCIe slot	Power
ITA-460-LOA1	ITA-460, 8G onboard memory, barebone unit	1	2	1	2	2	2 (By Y cable)	3	8 ~ 32V _{DC}

Optional Accessories

Part Number	Product Description
96PSA-A150W19P4-3	ADP A/D 100-240V 150W 19V C14 TERMINAL BLOCK 4P
1702002600	Power cord (USA) UL/CSA, 3-pin, 10A, 125V, 1.83 M, 180 D
1702002605	Power cord (EU), 3-pin, 10A, 250V 1.83M, 90D
1700000596-11	Power cord (CCC), 3-pin, 10A, 250V, 1.83 M, 180D
FRU-ARS2600-0001	External LAN cable (M12 X-Coded to RJ45)
FRU-AUDIO-0001	External audio cable (M12 A-Coded to 2 x Audio Jack)

Accessory Box List

Accessory	Description
Power cable	M16 6P (female) to 6P twisting and tinning stranded wires, 15cm
COM cable	D-SUB 9P (female) to 2 x D-SUB 9P (male), 15cm
SSD kit	SSD bracket and 2 x SATA cable
miniPCIe kit	Inner heatsink bracket, miniPCIe bracket
Thermal pad	Pads for SO-DIMM memory, mSATA, miniPCIe

For sales inquiries or further information, please contact us at Rail@Advantech.com.tw